

BRAMLEY



Manufacturers and Industrial Agents

Catalogue 0322

2022 Product Catalogue



GARRICK

 **Linishall**

Asada


KINKELDER

TOHO

www.bramley.co.nz

 Find us on
Facebook

BRAMLEY

CONTRACT MACHINING

Nothing beats experience!

RR Bramley & Co Ltd was established over 100 years ago and we've been contract machining ever since. A lot has changed for us in that time. We started manufacturing our own range of engineering machine tools back in the 1950's under our Bramley brand, and while the products may have changed, the brand remains synonymous for engineering quality and performance.

These days we run a suite of Okuma machining and turning centres supported with CAD/CAM/CNC production and Solid Works design, but it's still the experience of our team that sets us apart.

We've long established relationships with other leading NZ manufacturers, producing bespoke and production components for applications as varied as construction steel forming to food production, and even a bit of Americas Cup. We machine all metals, alloys and composites to the highest accuracy and quality

So why use us?

- **Experience.** You don't last 100 years in engineering unless you're dependable.
- **Capability.** Our team are highly skilled with average tenure of 20+ years each.
- **Proficiency.** We've been manufacturing for almost 70 years. Component manufacture and short run production are what we do.
- **Capacity.** Our manufacturing gives us flexibility to accommodate the urgent.
- **Network.** We have a long-established network of suppliers and sub-contractors that support us to deliver every time.



Turning Milling Drilling Jobbing Toolroom
 CAD/CAM/CNC Production Parts Assembly Light-fabrication
 MIG/TIG welding

Need contract machining services? Contact us now for more information
Ph 09 597 2035 or visit bramleymachining.co.nz

Contents

Industrial

Steel Bending and Forming 4

Heavy-duty Bar Benders	4
Manual Hydraulic Pipe Bender	4
Electric Hydraulic Pipe Bender	4
Universal Thin Wall Tube Bender	5
Manual Hydraulic Thin Wall Tube Bender	5
Electric Hydraulic Ram Assembly	5
ProBender 35t Powered Bender	6
ProBender 35t Accessories	6
Wrought Iron Scroll Bender Attachment	7
Picket & Basket Twister Attachment	7
Fully Optioned Wrought Iron Bender	7
Rod Bender	8
Pool Fence Tube Bender	8
Box & Pan Sheetmetal Folder	
- Bench Mounted	8
Box & Pan Sheetmetal Folder	
- With Stand	8
Bench Curving Rolls	9
Sheetmetal Curving Rolls	9
Chassis Hole Punches	9
Sheetmetal Swage,	
Jenny & Wiring Machines	10

Steel Cutting 11

Hand Lever Shears	11
Hand Lever Bench Punch	11
Heavy-duty Industrial Roller Stands	11
Heavy-duty Conveyor Roller Tables	11
5" Portable Bandsaw	12
5" 1 Phase Bandsaw	12
7" 1 Phase Bandsaw - Fixed Bow	12
7" 1 Phase Bandsaw - Swivel Bow	12
9" 1 Phase Bandsaw	13
9" 3 Phase Bandsaw	13
10" 3 Phase Bandsaw	13
Replacement Bandsaw Blades	13
Circular Cold-Cut Saws	14
HSS Circular Sawblades	14

Steel Drilling 15

Industrial Heavy-duty Drill Presses	15
Drill Drift	15
Workshop Drill Presses	16
Geared Head Industrial Machine Drill	17
Multi-purpose Sharpener	17

Grinding 18

Heavy-duty Bench Grinders	18
Combined Wheel & Belt Grinders	19
Belt & Disc Grinding Attachment	19
Belt Grinding Attachments	19
Polisher	20
Buff or Polishing Guard	20

Taper Spindles	20
Bench Grinder Accessories	20
Fully Optioned Linishall Grinder	20
Wright Linisher	21
Rubber Contact Wheels	21
Pedestal-mounted Belt Grinding	
Machines	21
Bench-mounted Belt Grinding	
Machines	21
Heavy-duty Linishers	22
Grinder/Notcher	22
Abrasive (Linishing) Belts	22
Hook & Loop Converter Pack	22
Grinding Wheels	22
Wire Wheels	22

Threading 23

Pipe & Bolt Threading Machines	23
Beaver 50 Trolley Cart	23
Rod/Bolt Threading Machine	24
Neat Threading Oil	24
Pipe Cutter Blades	24
Threading Dies & Spare Parts	24
Portable Power Pipe Threaders	25
Hand Ratchet Pipe Threaders	25
Pipe Stand	25
Nipple Chuck Accessory	25
Quick Release Chain Vices	25
Portable Work Stand	25

Roll Grooving 26

Roll Groover	26
Roll Groover Adapter & Drivebar	26
Roll Grooving Attachment	26
Hydraulic Roll Groovers	26
Power Drive	26

Lifting 27

Mini Chain Block	27
Mini Lever Hoists	27
Chain Blocks - Load Limited	27
Lever Hoists - Load Limited	27
Electric Chain Hoists	28
Ute / Small Truck Crane	28
Compact Wire Rope (Builders) Hoist	28
Load Skate Kit	29
Individual Load Skates	29
Push Type Girder Trolleys	29
Heavy-duty Ratchet Tie Downs	29
Universal Chain & Clamp Drum Lifter	29
Round Webbing Slings	30
Flat Webbing Slings	30

Plumbing Hand Tools

Tools for Pipe and Tube 31

Pipe Wrenches	31
Replacement Pipe Cutter Wheels	31
Chain & Strap Wrenches	31
Steel Pipe Cutters	31
Heavy-duty Steel Pipe Cutter	31
Tube Cutters	32
Replacement Tube Cutter Wheel	32
Internal/External Deburrer	32
Tube Benders	32
Tube Springs Set	32
Plastic Pipe Shears	33
Flaring Tools	34
Expander Kit	34
Portable Power Pipe Threaders	34
Quick Release Chain Vices	34
Portable Work Stand	34
Chassis Hole Punches	35
Portable Work Stand	35
Hand Ratchet Pipe Threaders	35
5" Portable Bandsaw	36
Brazing & Soldering Torch	36
Manual Pressure Test Pump	36
Reciprocating Pipe Saw	36

Warranty & Terms of Sale 37

Index to Products 38

DISCLAIMER: Images in this brochure are representative only. Please confirm all product specifications when ordering. Models available may vary without notice.

BRAMLEY

Heavy-duty Bar Benders

Model 062

Features 4-position quick cam action clamping.

Model 042

Uses full vice clamping with double spring return.

Model 060

Optional Floor Stand.


- Solid cast iron construction with swivel casting made from spheroidal graphite iron for extra strength
- Infinitely adjustable angle stop to achieve bends from 0° to just over 90°
- Swivel bending plate adjusts against steel being bent for sharp bending radius
- Optional stand available

MILD STEEL	062	042
Capacities in Cold Material		
FLAT BAR	80 x 6mm or 60 x 8mm or 30 x 12mm	100mm x 8mm or 60 x 10mm or 50 x 12mm
SQUARE	20 x 20mm	25 x 25mm
ROUND	Ø 20mm	Ø 25mm
Shipping	44kg / 0.045m ³	68kg / 0.08m ³

Capacities are rated on volume of steel to be bent. (i.e. as height is increased, width must be correspondingly decreased)



Model 062

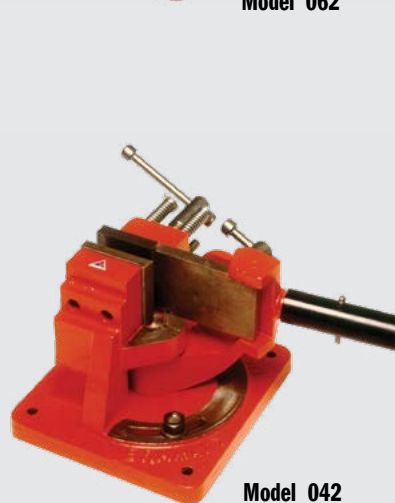

Model 042



Model 042 mounted onto optional stand Part No. 060




BRAMLEY

Manual Hydraulic Pipe Bender

Model 024 1/2" - 2" N.B.

Supplied with six formers, two bobbins (support slippers) and pins. 1/2", 3/4", 1", 1-1/4", 1-1/2", 2".

- Flip top frame for easy pipe and former replacement
- Spring return ram
- Bending radius measuring stop
- Two-stage pump action
- Lightweight aluminium alloy formers with large angle of arc to support pipe during bending. This results in a bend of superior quality
- Cross section of formers is of "elliptical" form to minimise flattening of bend
- Solid frame fabrication eliminates flexing during bending operation
- Formers' spigot size 38mm
- Shipping: 60kg / 0.09m³

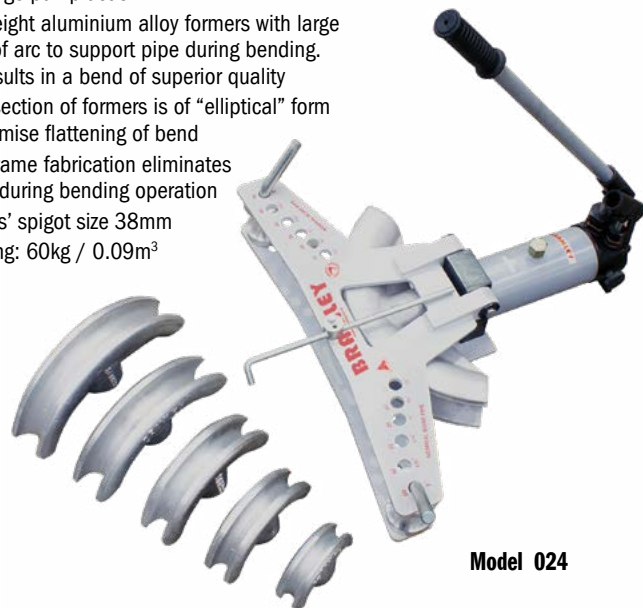

Model 024




BRAMLEY

Electric Hydraulic Pipe Bender

Model 026E 1/2" - 2" NB

Supplied with 1/2", 3/4", 1", 1.1/4", 1.1/2" & 2" pipe formers.

- Flip top frame for easy pipe and former replacement
- Enclosed, maintenance-free monoblock hydraulic system with automatic piston return
- High thrust hydraulic pump with 150 kN (15,000 kg) piston rating for high speed working
- Powerful, compact motor for efficiency with portability
- Easily dismantled to store or transport
- Shipping: 60kg / 0.10m³

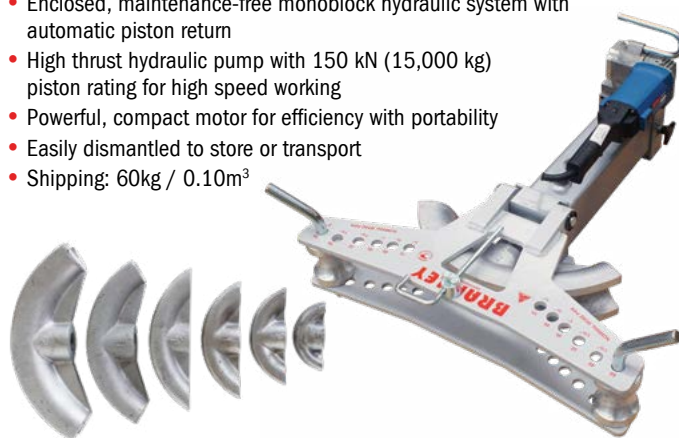

Note: you can retrofit the Electric/Hydraulic Ram Assembly to an existing BRAMLEY 024 Manual Hydraulic Pipe Bender

FORMER	RADIUS OF BEND	FORMER	RADIUS OF BEND
1/2"	75mm	1.1/4"	175mm
3/4"	105mm	1.1/2"	200mm
1"	140mm	2"	240mm



Pipe Bender Formers, Bobbin & Pin

All available separately.



Formers 1/2" - 2" NB

Bobbin & Pin

BRAMLEY

Universal Thin Wall Tube Bender

For bending thin wall tube in one operation up to a maximum of 180°

Model 064 (Round - 1.6mm wall thickness)

Supplied with a set of 5 formers & follow roller to suit round tube (1/2" - 1" dia).


Model 064S (Square)

Supplied with a set of 5 formers & follow roller to suit square tube (1/2" - 1").

- Lightweight aluminium alloy formers
- Square formers can fit onto the round tube bender (& vice-versa)
- The 1.1/8" round former is an optional extra
- Shipping: 27kg / 0.018m³
- Optional stand Model 065

Model 065 Heavy-duty Floor Stand (Optional)

Incorporates storage pegs for former.

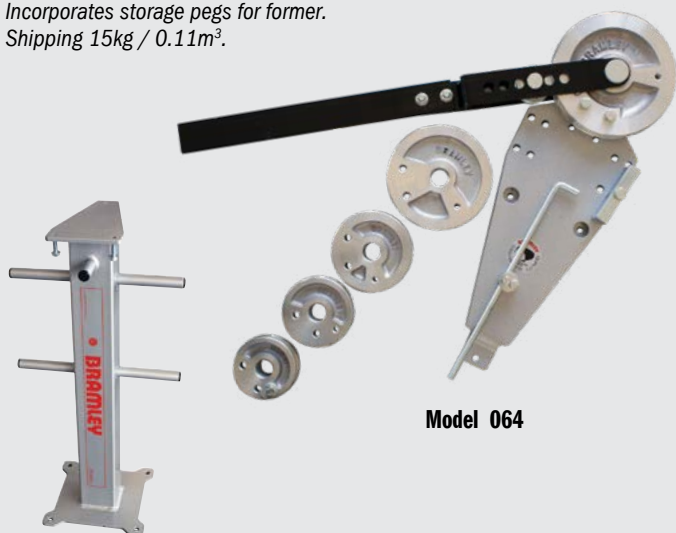Shipping 15kg / 0.11m³.

Model 064

Optional stand for Manual Tube Bender (Part No. 065)

ROUND FORMERS		SQUARE FORMERS	
TUBE SIZE	RADIUS OF BEND	TUBE SIZE	RADIUS OF BEND
1/2" 12.7mm	50mm	1/2" 12.7mm	65mm
5/8" 16.0mm	55mm	5/8" 16.0mm	85mm
3/4" 19.0mm	65mm	3/4" 19.0mm	100mm
7/8" 22.2mm	85mm	7/8" 22.2mm	115mm
1" 25.4mm	100mm	1" 25.4mm	115mm
1.1/8" 28.6mm	115mm		

BRAMLEY

Manual Hydraulic Thin Wall Tube Bender

Model 068

Mild Steel: 1" - 2" OD (2mm wall thickness) capacity

Stainless Steel: 1" - 1.1/2" OD (1.2mm wall thickness) capacity

Aluminium: 1" - 2" OD (2mm wall thickness) capacity

- 180° maximum bend for producing U-bends
- Supplied with tripod stand
- Shipping: 40kg / 0.05m³



Former & Slipper Sets sold separately.

Size range available:

TUBE SIZE	Centreline Radius of Bend
1" (25.4mm)	115mm
1.1/8" (28.6mm)	115mm
1.1/4" (31.8mm)	115mm
1.3/8" (35mm)	140mm
1.1/2" (38mm)	140mm
1.5/8" (41.3mm)	140mm
1.3/4" (44.5mm)	165mm
1.7/8" (47.6mm)	165mm
2" (51mm)	165mm

BRAMLEY

Electric Hydraulic Ram Assembly

Model 26-25E

Can be retrofitted to existing Bramley 024 Pipe Bender.

- #024 ONLY



BRAMLEY

ProBender 35t Powered Bender



This is a highly versatile bending machine that can handle heavy-duty bending operations for flat bar, square bar etc.

Optional accessories such as Pipe Bending, Rebar Bending, Pipe Notching, Tube Bending and Large Former tools can further increase the useability of the machine. This multi-function aspect allows the ProBender 35t Bending Machine to meet the diversified needs of the metal forming industry.

Model 088 (Standard Supply Bramley ProBender 35t with V Former)

Mild Steel Bending Capacity:

- Flat Bar: 100mm x 10mm / 60mm x 12mm / 50mm x 16mm
- Square Bar: 25mm x 25mm
- Round Bar: Ø25mm
- Shipping: 300kg / 1350 x 700 x 980mm

ProBender 35t Powered Bender

- Ambient temperature: 0 - 50°C
- Relative humidity: 20 - 85%
- The required space around the machine is at least 1000 mm.



Accessories available on request.

ProBender 35t Accessories

(Separate Supply)



Model 88-70 Pipe Bender Attachment

Pipe Bender Frame and Formers for pipe bending from 1/2" to 2" N.B. 1/2", 3/4", 1", 1-1/4", 1-1/2", 2".




Model 88-80 Rebar Bending Attachment

Rebar/Mild Steel Bender Frame and Formers for forming rebar - up to 32mm.



Model 88-90 Pipe Notcher Attachment

For easy notching of pipes for lateral weld connections. Different sizes dies available 1-1/4", 1-1/2" & 2" sold individually.



Model 88-50 Round Tube Bending Attachment

Bender Frame and Formers for tube bending from 1/2" - 1" N.B. (1-1/8" optional additional supply).



Model 88-50SQ Square Tube Bending Attachment

Bender Frame and Formers for square tube bending from 1/2" - 1" nominal size across flats.

Model 88-04L Large V Former Attachment

A heavy-duty former attachment designed to bend larger mild steel sections (cold): 75 x 16mm / 50 x 20mm.




BRAMLEY**Wrought Iron Scroll Bender Attachment****Model 067**

Fits onto the 064 Tube Bender Base Plate (separate supply) or can be mounted to your own workshop vice

For bending scrolls, eyes, spiral shapes and other complex shapes from round, square and flat bar in one operation.

- Tooling Plate has 48 holes drilled and tapped allowing tooling to be fitted anywhere on tooling plate
- Can bend Mild Steel up to 12mm (1/2") Round or Square (Minimum radius 10mm for 12mm material, 7mm for 10mm material)
- Can bend 25 x 6mm (1" x 1/4") Flat Mild Steel with a 7mm min. radius
- Will bend in any direction with unlimited number of rotations (depending only on material used)
- Standard range of scroll shape dies supplied with unit

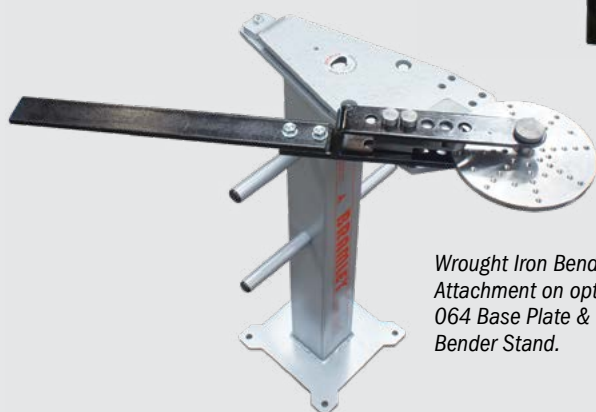

Wrought Iron Bender Attachment on optional 064 Base Plate & 065 Tube Bender Stand.




Wrought Iron Scroll Bender Attachment Components



Round bar



Flat bar



Eye in end of bar

BRAMLEY**Picket & Basket Twister Attachment****Model 069**

Fits onto the 065 Tube Bender Stand (separate supply) or can be mounted onto the leg of any suitable bench

For bending pickets and baskets from square and flat bar in one operation. Produces:

- Cages from 6mm square mild steel bar
- Twists from 6mm x 25mm flat mild steel bar or 12.5mm square

Picket & Basket Twister Attachment on optional 065 Tube Bender Stand.



Picket bending



Basket

Fully Optioned Wrought Iron Bender**Model 066**

Includes:

- 064 Tube Bender
- 065 Tube Bender Stand
- 067 Wrought Iron Bender Attachment
- 069 Picket & Basket Attachment



Examples of scrolls and twists possible with the Scroll Bender or Picket & Basket Twister Attachment

BRAMLEY

Rod Bender

Model 063

10/12/16mm M.S. rod capacity.

- Simple and easy to use rod bender
- When bending deformed section reinforcing bar, the effective diameter of the rod has been increased due to the deformation process – capacity is therefore reduced
- Bending radius 180° complies to New Zealand Building Codes
- Shipping: 13kg / 0.01m³



BRAMLEY

Box & Pan Sheetmetal Folder - Bench Mounted

Model 070 (610 x 1.2 mm capacity)

- Heavy-duty all steel construction for superior clamping and fold accuracy
- Interchangeable fingers for wide variety of box & pan sizes
Finger widths: 1 x 25, 50, 75, 100, 125 & 150mm, 2 x 37.5mm)
Replacement Sets Available.
- Cam adjustment on top beam provides simple and positive setting for different material thickness
- Simple robust clamping action
- Leg set available as optional extra
- Shipping: 31kg / 0.029m³



Optional Stand Legs
Part No. 77-21

BRAMLEY

Pool Fence Tube Bender

Model 035

For bending tube into a tight radius (up to 180°) – such as for pool fencing to meet New Zealand & Australian Standards.

- The standard unit is supplied with one former and follow roller suitable for 5/8" dia. round tube to give 100mm centres bending diameter
- Shipping: 13kg / 0.02m³
- Optional stand available (Part No. 065)



GARRICK

Box & Pan Sheetmetal Folder - With Stand

Model 4F (1220 x 1.2 mm capacity)

- Heavy-duty all steel construction for superior clamping and fold accuracy
- Interchangeable fingers for wide variety of box & pan sizes
- Cam adjustment on top beam provides simple and positive setting for different material thickness
- Simple robust clamping action
- Removable nose bar
- Mounted on rigid stand for easy access and folding operation



Available formers and follow rollers are as follows:

TUBE SIZE	BENDING DIAMETER	TUBE SIZE	BENDING DIAMETER
1/2" 12.7mm	100mm centres	5/8" 16.0mm	110mm centres
5/8" 16.0mm	100mm centres	3/4" 19.0mm	110mm centres

	MODEL 4F
Max Bending Length	1220mm (48")
Max. Thickness	1.2mm (20 Ga)
Max. Box Depth	100mm
Max. Lift of Beam	32mm
Beam Adjustment	6.5mm
Shipping	160kg / 0.73m ³

BRAMLEY**Bench Curving Rolls**

Model 057 (25mm x 450mm Rolls - 0.8 mm capacity)

Mainly used for rolling tubes/cylinders in sheet metal. The metal is 'pinched' between two rolls and curves as it comes into contact with the third (back) forming roll.

- Heavy duty all steel construction
- Top roll lifts for easy removal of tubular work
- Incorporates grooves for wiring work
- Shipping: 17kg / 0.027m³

**Sheetmetal Curving Rolls**

Model CR2.5X50 (63mm x 1270mm Rolls x 1.6 mm capacity)

- Solid steel & investment cast construction
- Wide sheetmetal base for stability
- Top roller lifts out for small diameter rolling
- Quick roller adjustment
- Mounted on rigid stand for easy access and operation
- Shipping: 150kg / 0.29m³

**BRAMLEY****Chassis Hole Punches**

- for Mild Steel & Stainless Steel

Model 010SET (Set of 6 popular sizes - 16, 20, 22, 25.4, 32 & 35 mm)

For cutting precision holes in sheet or panel, eliminating distortion to deliver a superior finish.

1/2" - 2" individual sizes available

- New 3 point design on punch for easier cutting
- New packaging
- Upgraded tool steel specification for increased life & performance
- Cut Stainless Steel more easily than previous design
- For simple cutting of neat holes in sheetmetal

Simple to use:

1. Drill a hole 1mm (1/32") larger than drive screw
2. Insert screw through die
3. Place screw through hole in metal & screw on punch
4. Turn drive screw with spanner or wrench until metal is cut



Individual protective packaging



Set of 6

MODEL	Size	Capacity Mild Steel	Capacity Stainless Steel	Bolt Thread
010-12.5	1/2" (12.5mm)	2mm	1.6mm	M8 x 1.0
010-16	5/8" (16mm)	2mm	1.6mm	M8 x 1.0
010-19	3/4" (19mm)	2mm	1.6mm	M10 x 1.25
010-20	20mm	2mm	1.6mm	M10 x 1.25
010-22	7/8" (22mm)	2mm	1.6mm	M10 x 1.25
010-25.5	1" (25.5mm)	2mm	1.6mm	M12 x 1.25
010-28.5	1-1/8" (28.5mm)	2.5mm	2mm	M12 x 1.25
010-30	1-3/16" (30mm)	2.5mm	2mm	M12 x 1.25
010-32	1-1/4" (32mm)	2.5mm	2mm	M12 x 1.25
010-35	1-3/8" (35mm)	2.5mm	2mm	M12 x 1.25
010-38	1-1/2" (38mm)	2.5mm	2mm	M12 x 1.25
010-41.5	1-5/8" (41.5mm)	2.5mm	2mm	M20 x 1.5
010-44.5	1-3/4" (44.5mm)	2.5mm	2mm	M20 x 1.5
010-48	1-7/8" (48mm)	2.5mm	2mm	M20 x 1.5
010-51	2" (51mm)	2.5mm	2mm	M20 x 1.5

BRAMLEY



Sheetmetal Swage, Jenny & Wiring Machines

Model 077 (Manual - 16 swg / 1.6 mm capacity)

Model 077M (Powered - 16 swg / 1.6 mm capacity - supplied with heavy-duty 750W (1HP), 3Ph motor and reduction gearbox to drive the rollers at 38rpm, controlled via interlocked forward / reverse footswitches.

- High quality, robust, industrial duty machines, manufactured from steel, which provides good strength and long life


CAPACITY	077 / 077M
SHEET	16 g (1.6mm)
THROAT DEPTH (with guide) (without guide)	100mm 240mm
Shipping	55kg / 0.062m ³ 120kg / 0.362m ³

Included with each machine:

- 2mm Wiring Top and Bottom
- 4mm Wiring Top and Bottom
- 7mm Wiring Top and Bottom
- 2x Bearing Blocks
- 2x Crimping
- 1x Jenny Roller Bottom
- 1x Flat Roller Top

Blank Wheels for 077 available on request

Standard wheels - 077

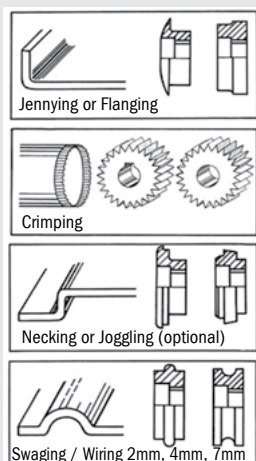

Optional wheels - 077

- 10mm Swaging / Wiring
- Necking
- Blank



To be released
early 2022



Model: 077 - manual



Model: 077M - powered



BRAMLEY

Hand Lever Shears

Model 074 - 6" (150mm)

Model 053 - 8" (200mm)

- Blades manufactured from high quality, wear resistant tool steel
- Lever action gives high mechanical advantage for easy cutting
- Body manufactured from thick section steel plate
- Handle balance spring assists ease of operation
- Simple lower blade adjustment for correct shearing tolerances
- Replacement blades available

Suitable for cutting stainless steel



Capacity	MODEL 074	MODEL 053
Plate	4mm	5mm
Flat	60 x 5mm	70 x 6mm
Round	11mm	13mm
Blade Length	155mm	200mm
Cutting Length (Max)	125mm	175mm
Shipping	14kg / 0.01m ³	25kg / 0.02m ³

BRAMLEY

Hand Lever Bench Punch

Model 023

For punching holes in sheetmetal.

Supplied complete with all punches and dies for 3mm to 10mm.

- Punches and dies manufactured from high quality, wear resistant, precision ground tool steel
- Body manufactured from thick section steel plate
- The hand lever rotates an eccentric cam giving the necessary mechanical advantage to a sliding plate which carries the punch
- 320mm throat depth
- Shipping: 25kg / 0.022m³



Punch Diameter	Material Thickness	Punch Diameter	Material Thickness
3mm	1.5mm	6mm	2.5mm
4mm	2mm	8mm	2.5mm
5mm	2.5mm	10mm	2.5mm

GARRICK

Heavy-duty Industrial Roller Stands

Model RS-Flat

Model RS-V

- RS-Flat suitable for Bandsaws, etc
- RS-V suitable for Threading Machines, Pipe and Rod, etc



MODEL	Roller Ø mm	Nett / Gross Weight kg	Operating Height	Max Capacity kg	Measurements mm
RS-Flat	52	15.1 / 16.1	580 - 970	800	530 x 515 x 95
RS-V	52	15.6 / 16.6	580 - 970	800	530 x 515 x 95

GARRICK

Heavy-duty Conveyor Roller Tables

Part No. RT60-7 (2 metre)

- Ideal for use with Bandsaws, Cold Saws etc or any other application in general workshop use where a substantial roller table is required
- Robust clamping system for leg height adjustment
- Fine adjustment facility on feet for easy levelling
- Available in 2m lengths
- Max height 1030mm
- Max weight 800kg



GARRICK

5" Portable Bandsaw

Model BS125

Suitable for steel, non-ferrous, plastics, wood etc:

- Constructed for easy portable use
- Only 20kg weight for easy & practical transport
- Strong and sturdy enough for stable work, but small enough to fit in car or ute
- Electronic infinitely variable speed
- Solid and stable base.
- From 0° to 45° adjustable cutting angle
- No cutting lubrication required



#BSSTAND Accessory Table
Stand available separately

MODEL	BS125
Motor	1.5kW DC
Blade Size (mm)	1440 x 12 x 0.65
Blade Speed (m/min)	20 - 70
Vice Tilt	0° - 60°
Cutting Capacity at 90°	● 125mm ■ 130 x 125mm
Cutting Capacity at 45°	● 76mm ■ 76 x 76mm
Carton Dimensions (mm)	550 x 370 x 400
Weight (kg) - Nett / Gross	20 / 21

GARRICK

7" 1 Phase Bandsaw - Fixed Bow

Model BS712 -

- Automatic down feed stop
- All ball-bearing blade guides
- All cast-iron frame and bed
- Hydraulic down feed control with infinitely variable adjustment
- Wheels allow easy movement around the workshop
- 3-speed belt drive allows machine to handle a wide range of materials



MODEL	BS712
Motor	1.1 kW 1 PH
Blade Size (mm)	2360 x 20 x 0.9
Blade Speed (m/min)	34 , 41, 59, 98
Bow Swivel	-
Cutting Capacity at 90°	● 178mm ■ 180 x 300mm
Cutting Capacity at 45°	● 110mm ■ 110 x 180mm
Carton Dimensions (mm)	1260 x 460 x 1080
Weight (kg) - Nett / Gross	145 / 175

GARRICK

5" 1 Phase Bandsaw

Model BS128

Suitable for steel, non-ferrous, plastics, wood etc:

- Automatic down feed stop
- Quick release vice and swivel cutting head from -45° to +60°
- All bearing blade guides
- All cast iron frame and bed
- Infinitely variable hydraulic down feed
- Pull-out handle and wheels to allow easy movement



MODEL	BS128
Motor	550W 1 PH
Blade Size (mm)	1640 x 13 x 0.6
Blade Speed (m/min)	23/34/54
Vice Tilt	0° - 60°
Cutting Capacity at 90°	● 125mm ■ 100 x 150mm
Cutting Capacity at 45°	● 95mm ■ 95 x 76mm
Cutting Capacity at 60°	● 50mm ■ 50 x 56mm
Carton Dimensions (mm)	940 x 450 x 540
Weight (kg) - Nett / Gross	90 / 81.4

GARRICK

7" 1 Phase Bandsaw - Swivel Bow

Model BS200S

- Automatic down feed stop
- Swivel cutting head from 0° to 45°
- All ball-bearing blade guides
- All cast-iron frame and bed
- Hydraulic down feed control with infinitely variable adjustment
- Wheels allow easy movement around the workshop
- 3-speed belt drive allows machine to handle a wide range of materials



MODEL	BS200S
Motor	1.1kW 1 PH
Blade Size (mm)	2360 x 20 x 0.9
Blade Speed (m/min)	24, 41, 61, 82
Bow Swivel	0° - 45°
Cutting Capacity at 90°	● 178mm ■ 178 x 210mm
Cutting Capacity at 45°	● 127mm ■ 85 x 140mm
Carton Dimensions (mm)	1290 x 730 x 1150
Weight (kg) - Nett / Gross	190 / 227

GARRICK

9" 1 Phase Bandsaw

Model BS912B

- Automatic down feed stop
- All ball-bearing blade guides
- All cast-iron frame and bed
- Hydraulic down feed control with infinitely variable adjustment
- Wheels allow for easy movement
- 3-speed belt drive allows machine to handle a wide range of materials




MODEL	BS912B
Motor	1.1kW, 1 PH
Blade Size (mm)	2655 x 27 x 0.9
Blade Speed (m/min)	26, 50, 73, 95
Bow Swivel	—
Cutting Capacity at 90°	● 230mm ■ 305 x 178mm
Cutting Capacity at 45°	● 150mm ■ 150 x 127mm
Carton Dimensions (mm)	1540 x 590 x 1150
Weight (kg) - Nett / Gross	230 / 260

GARRICK

9" 3 Phase Bandsaw

Model BS260HD

- Can replace traditional cold-cut saws, but with greater capacity
- Adjustable hydraulic cylinder for automatic feed option
- Swivel head can mitre cut to 60°
- Includes blade cleaning wire wheel
- Ball bearing blade guides
- Wide blade minimises run-out for more accurate cutting
- Supplied on Machine Stand with integrated coolant system
- Manual or automatic down feed operation

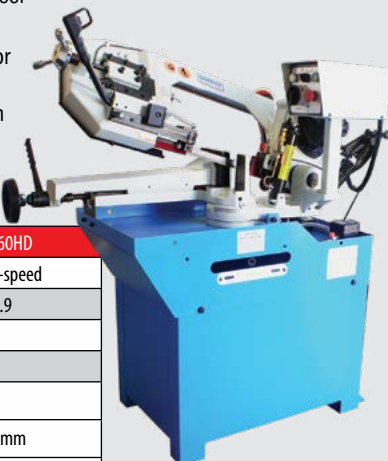

MODEL	BS260HD
Motor	1.1kW 3 PH 2-speed
Blade Size (mm)	2460 x 27 x 0.9
Blade Speed (m/min)	36/72
Vice Tilt	0° - 60°
Cutting Capacity at 90°	● 220mm ■ 220 x 220mm ■ 260 x 110mm
Cutting Capacity at 45°	● 150mm ■ 145 x 145mm
Cutting Capacity at 60°	● 90mm ■ 85 x 85mm
Carton Dimensions (mm)	1450 x 570 x 1040 (body) 830 x 780 x 170 (stand)
Weight (kg) - Nett / Gross	220 / 264

GARRICK

10" 3 Phase Bandsaw

Model BS1018R

- Can replace the function of traditional cold-cut saws, but with greater capacity
- Adjustable hydraulic cylinder for automatic feed option
- Swivel head can mitre cut to 45°
- Ball bearing blade guides
- Wide blade minimises run-out for more accurate cutting
- Supplied on Machine Stand with integrated coolant system
- Manual or automatic down feed operation



MODEL	BS1018R
Motor	1.5kW, 3 PH
Blade Size (mm)	3215 x 27 x 0.9
Blade Speed (m/min)	29/50/73/95
Bow Swivel	0° - 45°
Cutting Capacity at 90°	● 254mm ■ 254 x 254mm ■ 406 x 160mm
Cutting Capacity at 45°	● 170mm ■ 170 x 170mm ■ 190 x 160mm
Carton Dimensions (mm)	1820 x 780 x 1340
Weight (kg) - Nett / Gross	340 / 440

GARRICK

Replacement Bandsaw Blades



Part No.	Bandsaw Model	Blade Size / Type
BSB00	BS100	1138 x 12 x 0.65 14 TPI Carbon
BSB01	BS115 / BS128	1638 x 12 x 0.7 14 TPI Carbon
BSB02	BS115 / BS128	1638 x 12 x 0.7 18 TPI Carbon
BSB02A	BS115 / BS128	1640x12x0.69 10/14 TPI Bi-metal
BSB03	BS712/BS200	2360 x 19 x 0.8 10 TPI Carbon
BSB04	BS712/BS200	2360 x 19 x 0.8 14 TPI Carbon
BSB05	BS712/BS200	2360 x 19 x 0.8 10/14 TPI Bi-metal
BSB06	BS260	2460 x 25 x 0.9 6/10 TPI Bi-metal
BSB07	BS200	2360 x 19 x 0.8 8/12 TPI Bi-metal
BSB08	BS260	2460 x 25 x 0.9 10/14 TPI Bi-metal
BSB09A	BS912	2655x27x0.9 6/10 TPI Bi-metal
BSB10	BS260HD	2460x25x0.9 8/12 TPI Bi-metal
BSB11	BS1018R	3215x27x0.9 8/12 TPI Bi-metal

GARRICK

Circular Cold-Cut Saws

Model 0275 (275mm, 1-phase/1-speed Manual)

Model 0315 (315mm, 3-phase/2-speed Manual)

Model 0350 (350mm, 3-phase/2-speed Manual)

Garrick Circular Cold-cut Saws are designed to provide fast, economical metal cutting of all types and shapes of steel with a precision, burr-free milled finish. They have fully supported gears, balanced & adjustable pivot point, and an integral blade coolant system making it especially suitable for industrial use.

Features include:

- Rapid action, self-centring vice
- Enclosed guarding
- Variable mitre cutting (0 – 45°)
- Blade coolant system
- Heavy-duty construction

Model: 0275



Model: 0315



Model: 0350

MODEL	Cut Angle					
0275	0°	70mm	60mm	80 x 50mm	38mm	38mm
	45°	60mm	50mm	65 x 50mm	32mm	32mm
0315	0°	100mm	90mm	140 x 90mm	38mm	38mm
	45°	90mm	90mm	100 x 90mm	32mm	32mm
0350	0°	95mm	85mm	100 x 70mm	55mm	50mm
	45°	75mm	75mm	90 x 60mm	38mm	40mm

MODEL	Motor	Speeds	RPM	Power	Shipping
0275	240V Single Phase	1 speed	40	1.1kW / 1.5HP	174kg / 0.78m³
0315	415V Three Phase	2 speed	18 / 36	1.3kW / 1.7 HP	227kg / 0.78m³
0350	415V Three Phase	2 speed	40 / 80	1.6kW / 2.2HP	212kg / 0.78m³



KINKELDER®

HSS Circular Sawblades

After more than 50 years of specialised design and manufacture of HSS circular saw blades, Kinkelder has developed a body of technical know-how unmatched in the market – which is the reason we only use, and recommend, Kinkelder blades on our cold cut saws.

Kinkelder produces HSS metal circular sawblades in diameters varying from 150 to 570 mm in various designs.

Our standard stocked range is set out below.

Standard specifications:

Material	M2 = DIN 1.3343
Manufacturing standards	DIN 1836, 1837, 1838 and 1840
Tooth forms	BW, HZ
Cutting clearance angle	18° / 8°
Design hardness	Steam-treated 63-65 HRc

Standard HSS Circular Sawblade Stocked Range

Dia. x thickness mm	Bore-hole mm	Pinhole combinations	Weight kg
225 x 2	40	2/8.5/55, 4/12/64	0.6
250 x 2	32	2/8.5/45, 2/11/63	0.7
	40	2/8.5/55, 4/12/64	
275 x 2	32	2/8.5/45, 2/11/63	0.8
	40	2/8.5/55, 4/12/64	
315 x 2.5	32	2/8.5/45, 2/11/63	1.3
	40	2/8.5/55, 4/12/64	
350 x 2.5	32	2/8.5/45, 2/9/50, 2/12/64	1.6
	40	2/8.5/45, 4/12/64	
370 x 2.5	32	2/8.5/45, 2/9/50, 2/12/64	1.6
400 x 3	40	2/8.5/55, 4/12/64	2.5
520 x 4	40	Friction Sawblade (JIFFY)	10





Industrial Heavy-duty Drill Presses

Model DB20

Model DP25

Model DP32

- Square tables for larger work area, with 'T' slots for solid clamping
- Tables tilt and rotate
- Solid one piece Cast Iron operating handles
- Safety Guard with flip up cover over chuck as standard
- Emergency stop switches
- Heavy-duty precision depth stops
- Quick action, positive motor adjustment for belt tensioning
- Rack & pinion table height adjustment
- Column & Quill precision machined from thick wall tube for rigidity
- Work light under head (bulb not included for transport reasons)
- Powerful 240V Aluminium TEFC motors
- 'A' section V-belts & pulleys
- Includes Drill Chuck & Arbor, Chuck Key and Drill Drift

Manufactured to a premium quality standard to suit heavy-duty applications

MODEL	DB20	DP25	DP32
Type	Bench	Pedestal	Pedestal
Motor	550W	750W	1100W
Max Drilling Capacity	20mm	25mm	32mm
Chuck Size B16 (mm)	3 - 16	3 - 16	3 - 16
Swing (mm)	356	432	508
Spindle Taper	MT2	MT3	MT4
Spindle Travel (mm)	80	80	120
No. of Speeds	12	12	12
Speed Range (rpm)	120 - 2580	120 - 2580	150 - 2700
Overall Height (mm)	1000	1650	1710
Column Diameter (mm)	80	80	92
Quill Diameter	52	52	72
Table Dimensions (mm)	290 x 290	345 x 345	475 x 425
Carton Dimensions	840 x 570 x 290	1440 x 650 x 320	1475 x 650 x 350
Weight (kg) - Nett / Gross	82 / 86	108 / 117	143 / 153

BRAMLEY

Drill Drift

Model DRIFT

Specifically designed in NZ for one-handed operation, leaving the other hand free to hold the bit, eliminating bit damage on exit and operator injury.

- Spring-loaded drive action requires just one hand to operate.
Tap, tap and the drill is safely out
- Manufactured from high strength bronze casting, complete with hammer head for tapping morse tapers together



Our unique 'V' section head has been specifically designed to house larger bearings for greater arbour support and drill accuracy



Model DP25



Model DB20

WITH HEAVY-DUTY
'A' SECTION BELTS



Model DP32



Workshop Drill Presses

Model DBW20

Model DPW25

- Square tables for larger work area, with 'T' slots for solid clamping
- Tables tilt and rotate
- Safety Guard with flip up cover over chuck as standard
- Emergency stop switches
- Quick action, positive motor adjustment for belt tensioning
- Rack & pinion table height adjustment
- Column & Quill precision machined from thick wall tube for rigidity
- Includes Drill Chuck & Arbor, Chuck Key and Drill Drift

MODEL	DBW20	DPW25
Type	Bench	Pedestal
Motor	650W	650W
Max Drilling Capacity	20mm	25mm
Chuck Size B16 (mm)	3 - 16	3 - 16
Swing (mm)	356	432
Spindle Taper	MT2	MT3
Spindle Travel (mm)	80	80
No. of Speeds	12	12
Speed Range (rpm)	180 - 2770	280 - 2380
Overall Height (mm)	1000	1650
Column Diameter (mm)	70	70
Quill Diameter	52	52
Table Dimensions (mm)	225 x 225	295 x 295
Carton Dimensions	840 x 570 x 290	1440 x 650 x 320
Weight (kg) - Nett / Gross	45 / 48	59 / 62



With NEW 650 W High Torque Aluminium Motor

Model DBW20



Model DPW25





Geared Head Industrial Machine Drill

Model T25

- Square tables for larger work area, with 'T' slots for solid clamping
- Safety Guard with flip up cover over chuck as standard
- Emergency stop switches
- Rack & pinion table height adjustment
- Column & Quill precision machined from thick wall tube for rigidity
- Machined base for larger work
- Includes Drill Chuck & Arbor, Chuck Key and Drill Drift



Machined base

MODEL	T25
Motor 2-speed (kW)	0.65 / 0.9 3 phase
Drill Capacity (mm)	25
Spindle Travel (mm)	125
Morse Taper	MT3
Speeds (rpm)	105, 210, 350, 455, 700, 890, 1450, 2900
Weight (kg)	200
Auto Feed	No




Multi-purpose Sharpener

Model JS950M

The multi-purpose sharpener is compact and easy and safe to operate. It accurately grinds correct tip angles and restores sharp-as-new cutting edges of all drill bits (Ø3-13mm), knives & scissors.

- For Drill bit, Knife & Scissor sharpening
- Drill bit angle fixation
- Drill bit adaptor
- Dust collection
- Drill Diameter 3 - 13mm

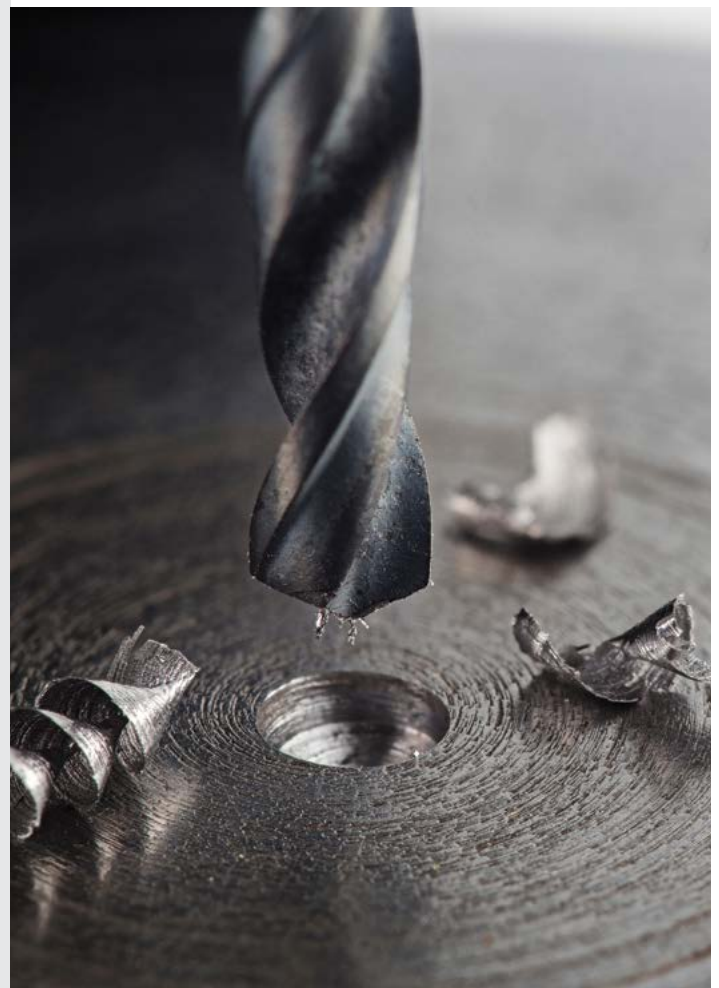

Linishall is THE name for true industrial bench grinders. Manufactured with larger motors, bigger bearings, fan cooled, heavy-duty castings for superior duty-cycles and packed with other features
– Linishall is your first choice when reliability, durability and versatility matter!”



Heavy-duty Bench Grinders

Model BG6 (150mm / 6")

Model BG8 (200mm / 8")

Model BG10 (250mm / 10")

The Linishall Heavy-duty Industrial Bench Grinder is the first choice for all applications where reliability, long-life and usability are important. Unique adjustable eye shields with magnifying glass assist in safe, accurate finishing or roughing of all types of componentry, tooling, etc.


Optional additions include a pedestal stand, belt and disc grinding attachment and a mitre table.

- Wheel dresser
- Adjustable oval eye shields with magnifying glass on 6" and 8" models
- Adjustable square eyeshield on 10" model
- Cast metal tool rests
- Adjustable work light
- Pre-loaded bearings (no end play)
- 2850 rpm
- Heavy sheetmetal wheel guards

MODEL	Grinding Wheel Dia.	Motor	Shaft Dia. (Wheel Bore)	Thread (Nut)
BG6	150mm (6")	450W (0.6HP)	12.7mm (1/2")	M12 x 1.75
BG8	200mm (8")	750W (1.0HP)	16mm (5/8")	M16 x 2.0
BG10	250mm (10")	900W (1.2HP)	19.5mm (3/4")	M18 x 2.5



Model: BG6

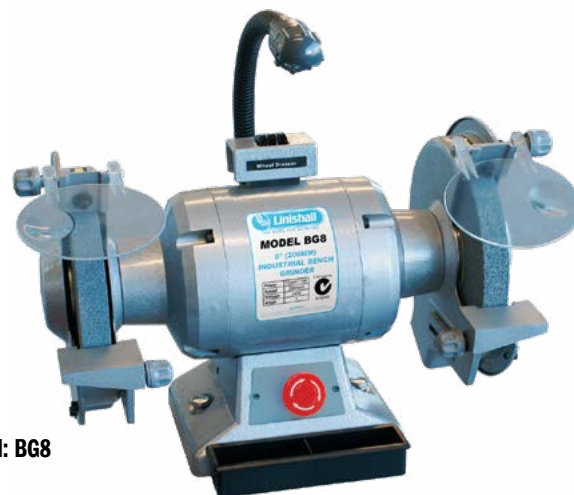

Model: BG8



Model: BG10

**All Linishall grinders
come with Emergency
Stops fitted as
standard!**





Combined Wheel & Belt Grinders

Adds the versatility of having both a grinding wheel and a finishing belt on the same machine.

- Supplied fully assembled
- Can be fitted onto Pedestal BGP (available separately) for free-standing operation

Model BG8L

- Model BG8L consists of a 915 x 50mm Belt & Disc Grinding Attachment fitted to the Linishall 8" (200mm) Heavy Duty Bench Grinder



Belt & Disc Grinding Attachment

Model 036P

supplied with full installation instructions.

- Fits easily to most 200mm (8") or 250mm (10") bench grinders
- Belt size: 915 mm x 50mm (36" x 2")
- Disc size: 178mm (7")
- Rugged cast metal construction
- Simple assembly & adjustment
- Longer rubber contact wheel life
- Easy belt tracking with no tools required



Belt Grinding Attachments

Model 1220/50

Model 1520/50

Model 1520/100

- Fits easily to the Linishall BG10 Bench Grinder with Adapter Sleeve
- Also attaches to an electric motor (preferred) or some, other brand bench grinders (*correct connection the responsibility of the purchaser*)
- Performance is directly related to motor power
 - Minimum 750 W (1 HP) recommended
- 3 common belt sizes
- Longer Rubber Contact Wheel life with air grooves for cooling
- Easy belt tracking with no tools required



MODEL	Belt Size	Contact Wheel	Drive Wheel
1220/50	1220mm x 50mm	100mm x 50 mm	175mm x 50mm
1520/50	1520mm x 50mm	100mm x 50 mm	175mm x 50mm
1520/100	1520mm x 100mm	100mm x 100 mm	175mm x 100mm

BG10 + 1220 Combination Example

- Consisting of a 1220 x 50 Belt Grinding Attachment fitted to the Linishall 10" (250mm) Heavy Duty Bench Grinder





Polisher

Model BG8BUFF

BG8 grinder fitted with taper spindles to take calico mops or similar to create a polishing machine.




Buff or Polishing Guard

Model BG8-BUFFGUARD

- Suits most 200mm (8") Grinders
- Includes Dust extraction port
- Fits either RH or LH side

(Does not include taper spindle shown)



Taper Spindles

To take polishing & buffing mops. Models for:

- BG8 Grinder (M16 thread)
- BG10 Grinder (M18 thread)
- Left Hand & Right Hand Models



MODEL	Grinder Model	Thread Size	Length
BG8-LHTS or BG8-RHTS	BG8	M16	130mm
BG10-LHTS or BG10-RHTS	BG10	M18	140mm



Bench Grinder Accessories

Pedestal

Model BGP (6", 8" & 10" grinders)

Models suitable for mounting Linishall, and most other brands' 6", 8" and 10" grinders.

- Solid sheetmetal construction



Mitre Table

Model 037

Designed to fit the Model 036P Belt & Disc Grinding Attachment

- Side tilting for stable grinding against disc.



Fully Optioned Linishall Grinder

Fully featured Linishall Grinder with Belt & Disc Grinding Attachment, Pedestal and Mitre Table.

**COMBINATIONS CAN BE BUILT TO YOUR INDIVIDUAL REQUIREMENTS
- PLEASE ENQUIRE**

Can include:

- BG8 / BG10 Bench Grinder
- 036 Belt & Disc Grinding Attachment
- BGP Pedestal
- 037 Mitre Table





Wright Linisher

Model 038/P1 or P3

Highly versatile, robust linishing machine offering multiple finishing options for the modern workshop.

This is truly the ultimate for linishing operations when you want high material removal, and access for large work pieces.
50mm belt width with 1 or 3 phase motor.

- 2745 x 50mm belt size
- 5280 SFPM on the belt maximises grinding capacity
- 100mm (4") diameter grooved rubber contact wheel
- 350mm (14") diameter grinding disc
- Work table slotted for mitre and angle grinding
- 1.1kW (1.5HP) 1 or 3-phase motor



Rubber Contact Wheels

- Grooved to create air flow for natural cooling effect
- Crowned to assist belt tracking
- Large size range to fit most Linishing machines or custom applications.
- Can be attached to a motor, or suitably powered grinder, and used in conjunction with a Backstand Idler



Wheel Size		Replacement Wheel only	Complete with spindle or mounting hub
100mm dia x 50mm wide	(4" x 2")	RCW420	RCW421
100mm dia x 100mm wide	(4" x 4")	RCW440	RCW441
122mm dia x 100mm wide	(5" x 4")	RCW1220/100	(Suits Linisher 1220/100)
200mm dia x 75mm wide	(8" x 3")	RCW2000/75	(Suits Linisher 2000/75)
200mm dia x 150mm wide	(8" x 6")	RCW2000/150	(Suits Linisher 2000/150)



Pedestal-mounted Belt Grinding Machines

Model 1520/100/P1 or P3

- Belt Grinding Attachment fitted to a continuous rated 1.1 kW (1.5 HP) TEFC Motor and mounted on a pedestal to form a free standing machine
- Has IP65 rated switchgear fitted which includes thermal overload and no-volt release
- Single or 3 Phase option as indicated by model number
- 1 belt size
- Longer Rubber Contact Wheel life with air grooves for cooling
- Easy belt tracking with no tools required



MODEL	Belt Size	Motor
1520/100/P1	1520mm x 100mm	1 Ph ~ 240V
1520/100/P3	1520mm x 100mm	3 Ph ~ 415V



Bench-mounted Belt Grinding Machines

Model 1220/50/M1 or M3

Model 1520/100/M1 or M3

- Belt Grinding Attachment fitted to a continuous rated 1.1 kW (1.5 HP) TEFC Motor
- Single or 3 Phase option as indicated by model number
- 2 common belt sizes
- Longer Rubber Contact Wheel life with air grooves for cooling.
- Easy belt tracking with no tools required



MODEL	Belt Size	Motor
1220/50/M1	1220mm x 50mm	1 Ph ~ 240V
1220/50/M3	1220mm x 50mm	3 Ph ~ 415V
1520/100/M1	1520mm x 100mm	1 Ph ~ 240V
1520/100/M3	1520mm x 100mm	3 Ph ~ 415V



Heavy-duty Linishers

Model 1220/100/P1

Model 2000/75/P1 or P3

Model 2000/150/P3

- Fully guarded with hinged flap on top for platen finishing
- Front dust chute
- Rear dust extractor port
- Front eye guard
- Tool rests
- Adjustable (by swivelling about pivot point) for height
- Simple tracking & belt change
- 1 or 3 Phase options as indicated by model number
- Belt sizes: 1220 x 100mm, 2000 x 75 mm or 2000 x 150 mm

MODEL	Belt Size	Motor	Belt Speed	Shipping
1220/100/P1	1220mm x 100mm	1.5kW (2HP) ~ 1Ph	19 m/s	41kg / 620 x 400 x 345mm
2000/75/P1	2000mm x 75mm	3.0kW (4HP) ~ 1Ph	30 m/s	93kg / 700 x 490 x 1130mm
2000/75/P3	2000mm x 75mm	3.0kW (4HP) ~ 3Ph	30 m/s	93kg / 700 x 490 x 1130mm
2000/150/P3	2000mm x 150mm	4.0kW (5HP) ~ 3Ph	29 m/s	110kg / 700 x 530 x 1130mm



Model: 1220/100/P1

Slower speed machine avoids burning softer material such as wood, plastics etc. Can also be used as a bench mounted machine by removing the included delta stand - see at right.



**Model: 2000/75/P1
2000/75/P3**



Model: 2000/150/P3



Grinder/Notcher

Model MBS100 (Includes rollers - 20, 25, 32, 40, 42, 50, 65 & 76mm)

- Combination Tube / Surface / Linishall grinding machine
- Can notch tube up to 75mm
- 2-speed motor (Forward/Reverse)
- 2.2 / 2.8 kW 3 PH
- 2000 x 100mm belt size
- Dust collector tray
- 200 kg weight



Complete with Rollers



Abrasive (Linishing) Belts

Part No. 36C-09 (915/50 mm size)

To suit all Linishall, and most other Belt Grinders.



Hook & Loop Converter Pack

Part No. DISC-H&L-PACK

Suits Linishall 915 Belt & Disc Grinding Attachment and other brands.

- 180mm (7") diameter
- 1x Conversion Disc, 5x Assorted Sanding Discs 60G, 80G, 120G



Grinding Wheels

Part No. GW36 - 200 x 25 16 A36g

Part No. GW60 - 200 x 25 16 A60g

In medium & fine grits. To suit 200mm (8") bench grinders.



Wire Wheels

Part No. WW150 - 150mm (6")

Part No. WW200 - 200mm (8")

Part No. WW250 - 250mm (10")

To suit 6", 8" and 10" bench grinders.



Asada

Pipe & Bolt Threading Machines

Model B50-AT (Automatic)

Model B80-AT (Automatic)


Model B100-AT (Automatic)

- Threading Machines designed to give accurate threads for most pipe and bolt (rod) applications
- BSPT, NPT, BSW, UNC, UNF, Conduit and Metric threads possible in such materials as stainless, high tensile, galvanised and mild steels
- Footswitch included on all machines for safety

MODEL	Standard Threading Capacity	Motor	Spindle Speed
Beaver 50 (Auto)	1/2" - 2" BSPT or NPT Pipe Automatic Die-Head version	Universal Single Phase 750W	40rpm (No load)
Beaver 80 (Auto)	1/2" - 3" BSPT or NPT Pipe Automatic Die-Head version	Universal Single Phase 1140W	33rpm (No load)
Beaver 100 (Auto)	1/2" - 4" BSPT or NPT Pipe Automatic Die-Head version	Universal Single Phase 1140W	48 / 18rpm (2 Speed)



Powerful motor



Automatic Die Head




Quality Pipe Cutter



Non-slip impact clamping Hammer Chuck



Specially forged Reamer



Dies available for Stainless or High Tensile Steels



All units supplied with legs & footswitch

Model: B50-AT

Model: B80-AT




Model: B100-AT

Note: all machines supplied as standard with all dies & dieheads from 1/2" BSPT up to maximum capacity, cutter, reamer, threading oil and tubular legs. Dieheads and dies for 1/4" - 3/8" BSPT, NPT, Conduit and all bolt sizes are available as optional extras.

Beaver 50 Trolley Cart

Model B50-FWS

- Collapsible trolley cart for mounting the ASADA B50-AT Threading Machine
- Working tray for ease of use
- Portable
- Gas cylinders for easy raising from collapsed position
- All steel construction, powder coated

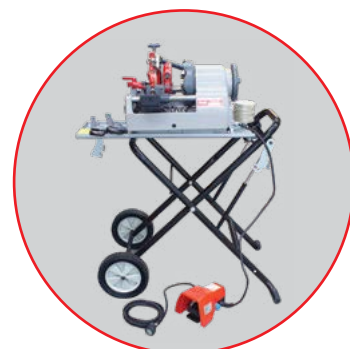

Trolley Cart with threading machine & accessories

Asada

Rod/Bolt Threading Machine

Model BTM25

- Dedicated machine designed specifically for threading bolt and rod
- Faster spindle speed than Pipe Threading Machines
- Rod is held in vice to allow threading of long lengths or bent material
- Machine is for right hand threading only. (A separate machine for left hand threading only is available on request)



MODEL	Standard Threading Capacity	Motor size	Spindle Speed
BTM25	8mm -24mm	1 Phase 1140W (1.5HP)	80rpm (No load)

Note: supplied as standard with M12 and M14 - M16 dies.
(Other sizes available: M8 - M24, BSW, UNC, UNF)

Asada

Neat Threading Oil

- Essential for long die life.
- Specifically formulated to handle the high pressures generated during threading operation
- Standard grade for general purpose threading
- High grade for threading stainless and high tensile steel
- MSDS sheet available on request

Asada Standard Grade Threading Oil

For Galvanised / General Purpose threading with ALLOY DIES.

Part No. OIL4 (4 L)



Asada High Grade Mineral Threading Oil

For Stainless Steel / High Tensile threading with HSS dies.

Part No OIL4RED (4L)



LACTUCA LT 3000

Part No. OIL1 (1L)

Soluble cutting oil for use with Cold-cut Saws or Bandsaws. Routine machining of non-ferrous metals and high-grade carbon steels.

- Excellent cooling and lubricant power
- Efficient protection of machined parts and machines against corrosion
- Reduced cutting effort
- Extended tool lifetime
- Very good surface finish to parts



Asada

Pipe Cutter Blades

Part No. SP04510 (standard)



Asada

Threading Dies & Spare Parts

MODEL/TYPE	Code
BEAVER 50-AT	B50-AT
BEAVER 80-AT	B80-AT
BEAVER 100-AT	B100-AT
PORTABLE TROLLEY BEAVER 50	B50-FWS
ROLL GROOVER	RG916
ROLL GROOVER ASADA TYPE	RG640
BRACKET CONVERSION	RG/BRACKET
DRIVE BAR	R/G BAR
4 LITRE THREADING OIL	OIL4
16 LITRE DRUM TH OIL	OIL16
CUTTER BLADE	SP04510
PIN FOR CUTTER WHEEL	SP21508
B50 JAWS EACH	SPBE644
B80 / 100 JAWS EACH	SPBE826
AS2/B50 CARBON BRUSH SET	SP70851
B80/B100 CARBON BRUSH SET	SP70858
BOLT DIE HEAD M 10-14	SDH20158
AUTO DIE HEAD 1/2 - 2 BSPT	SDH52100
AUTO DIE HEAD 2.1/2 - 3 BSPT	SDH52200
TONEX DIES 1/2 - 3/4 BSPT RIGID	SD89146
TONEX DIES 1 - 2 BSPT RIGID	SD89147
ALLOY DIES 1/4 - 3/8 BSPT	SD89046
ALLOY DIES AT 1/2 - 3/4 BSPT	SD89211
ALLOY DIES AT 1 - 2 (2) BSPT	SD89227
ALLOY DIES AT 2 - 3 BSPT	SD89051
ALLOY DIES AT 2.1/2 - 4 BSPT	SD59803
ALLOY DIES AT 1/2 - 3/4 NPT	SD89101
ALLOY DIES AT 1 - 1.1/2 (2) NPT	SD89102
ALLOY DIES AT 2.1/2 - 3 NPT	SD89245
ALLOY DIES AT 2.1/2 - 4 NPT	SD59912
HSS DIES AT 1/2 - 3/4 BSPT	SD89203
HSS DIES AT 1 - 1.1/2 (2) BSPT	SD89248
HSS DIES AT 2 - 3 BSPT	SD89142
HSS DIES AT 2.1/2 - 4 BSPT	SD59966
HSS DIES AT 1/2 - 3/4 NPT	SD89157
HSS DIES AT 1 - 1.1/2 (2) NPT	SD89158
ALLOY BOLT DIES 10 MM	SD89002
ALLOY BOLT DIES 12 MM	SD89003
ALLOY BOLT DIES 14 - 16 MM	SD89140
ALLOY BOLT DIES 18 - 22 MM	SD89141
ALLOY BOLT DIES 24 MM	SD89009
ALLOY BOLT DIES 30 - 33 MM	SD89193



Manual Die Head



Auto Die Head

Note:

Bolt dies can only be used in bolt die head.

Threading dies under 1/2 inch require different die head.

Alloy dies are for galv pipe etc.

HSS dies are only for stainless steel/High Tensile - use Mineral Oil.

Dies are covered under warranty as long as correct oil is used.

GARRICK

Portable Power Pipe Threaders

Model PPT2 (1/2" - 2")

- Designed for versatile power threading without a vice
- Suitable for "on-site" applications
- Threads at 15-25 rpm with 60 rpm geared reverse
- Supplied with die-heads 1/2", 3/4", 1", 1.1/4", 1.1/2", 2"
- Robust carrying case



GARRICK

Hand Ratchet Pipe Threaders

Model HRT100 (1/2" - 1" BSPT)

Model HRT125 (1/2" - 1.1/4" BSPT)

Model HRT200 (1/2" - 2" BSPT)

- Long life HSS dies with "Easy Start" lead chamfer
- NPT dies available
- Supplied in robust carry case



HRT125



HRT100



HRT200

GARRICK

Pipe Stand

Model RS-V

For supporting material that is being worked on, especially long lengths.

MODEL	Roller Ø mm	Nett / Gross Weight kg	Operating Height	Max Capacity kg
RS-V	52	15.6 / 16.6	580 - 970	800



GARRICK

Nipple Chuck Accessory

Model NC (1/2" - 2" BSPT capacity)

Pipe threading accessory that holds short or close nipples for threading second end.

- Nipple tightens against end face of pipe (not on the thread) for easy releasing of the nipple after threading
- Includes insert body & 5 adaptors 1/2", 3/4", 1", 1.1/4" & 1.1/2" (nipple chuck body serves as 2" adaptor), carrying handle & spanner
- For use with pipe threading machines (i.e. Asada Beaver 50)



GARRICK

Quick Release Chain Vices

Part No. CV2.5 (1/2 - 2.1/2" capacity)

Part No. CV6 (2.1/2 - 6" capacity)

- With lever action to tighten or release the chain
- Easily adapts to stands and work benches
- Forged steel jaws
- Cast iron base



GARRICK

Portable Work Stand

Part No. TSCV

- Includes chain pipe vice (up to 6" pipe)
- Collapsible workbench in aluminium
- Can be used with any kind of pipe
- Includes tray fold in for easy carrying and setup
- Includes slots for hanging tools
- Stable work platform with roof support adjustment



GARRICK

Roll Groover

Part No. RG916

- Compact, durable and efficient lightweight roll grooving attachment
- Fits to most threading machines including Portable Power Threaders
- Up to 6" N.B. pipe capacity
- Easy operation with ergonomic handle to apply pressure to wheels



Asada

Roll Groover

Part No. RG640

- Robust compact unit for steel pipe up to 6" Sch.40
- Cross handle for easy feeding speed adjustment
- Simple grooving depth adjustment.
- Sizes to fit most threading machines including Portable Power Threaders



GARRICK

Hydraulic Roll Groovers

Models **RG6C** (1.1/4" - 6")
RG12C (2.1/2" - 12")

- Powerful yet quiet motor
- Fine adjustment for groove depth and regulation
- Compact and very stable machine design
- Includes Pipe Roller V-stand as pictured
- INDENT ONLY - 3 WEEK DELIVERY



MODEL	Grooving Capacity	Electric Motor	Dimensions (mm)
RG6C	Sch10 1.1/4"-6", Sch40 1.1/4"-3"	550W 24 rpm	630 x 40 x 630
RG12C	Sch10 2.1/2"-12", Sch40 2.1/2"-8"	750W 24 rpm	630 x 40 x 630

GARRICK

Roll Groover Adapter & Drivebar

Part No. R/G BRACKET

To fit onto the ASADA B50 Threading Machine so the RG916 Roll Groover (above) can be used.



GARRICK

Roll Grooving Attachment

Part No. RG12E

- Fits on GARRICK Power Drive (Model PD), or other brands
- Powerful unit with 10 ton hydraulic ram
- Grooving Capacity:
Sch10 2"-12"
Sch40 2"-8"
- INDENT ONLY - 3 WEEK DELIVERY



*Shown fitted to a PD
GARRICK Power Drive.*

GARRICK

Power Drive

Model PD

- Single-phase 1500w (2HP) universal electric motor - 38 rpm
- Includes sturdy tripod & footswitch
- INDENT ONLY - 3 WEEK DELIVERY



GARRICK

Mini Chain Block

A compact & lightweight chain block for confined spaces or where the lighter weight is a consideration for carrying the unit to the job (e.g. rigging or mines)

- Industrial quality - complies with AS / NZS 1418.2 (Meets or exceeds all relevant world standards)
- Super strength alloy load chain
- All hooks fitted with spring safety latch
- Test Certificate & Instruction Manual supplied with every Chain Block
- Compact - minimum headroom (hook to hook = 230mm)
- Lightweight robust construction - only 3.5 kg



MODEL	Size	Lift
GCB0022	0.25T	2 m

GARRICK

Chain Blocks

- Load Limited

With the added safety of overload protection

Models from 0.5 T to 5 T ex. stock (larger sizes available ex. factory)

- Overload Protection facility is factory set to prevent abuse, damage or unsafe practice
- Robust all steel construction
- Super strength alloy steel chain
- All hooks fitted with spring safety latch
- Durable stainless steel labels
- Test Certificate and Instruction Manual supplied with every Chain Block
- Comply with AS/NZS1418.2 (Meets or exceeds all relevant world standards)



MODEL	Size	Lift
GCBLL0103	1T	3m
GCBLL0106	1T	6m
GCBLL0203	2T	3m
GCBLL0206	2T	6m
GCBLL0303	3T	3m
GCBLL0506	5T	6m

GARRICK

Mini Lever Hoists

Compact & lightweight Lever Hoists for confined spaces or where the lighter weight is a consideration for carrying the unit to the job (e.g. rigging or mines)

- Industrial quality - complies with AS / NZS 1418.2 (Meets or exceeds all relevant world standards)
- Super strength alloy load chain
- All hooks fitted with spring safety latch
- Test Certificate & Instruction Manual supplied with every Lever Hoist
- Compact - minimum headroom (hook to hook)
- Lightweight robust construction - from only 2 kg



MODEL	Capacity	Lift	Headroom	Weight
GLH025	0.25T	1.5 m	215 mm	2 kg
GLH050	0.5T	1.5 m	255 mm	3.5 kg

GARRICK

Lever Hoists

- Load Limited

With the added safety of overload protection

Models from 0.75 T to 3 T ex. stock (larger sizes available ex. factory)

- Overload Protection facility is factory set to prevent abuse, damage or unsafe practice
- Robust all steel construction
- Super strength alloy load chain
- All hooks fitted with spring safety latch
- Durable stainless steel labels
- Test Certificate & Instruction Manual supplied with every Lever Hoist
- Industrial quality - complies with AS / NZS 1418.2 (Meets or exceeds all relevant world standards)



MODEL	Size	Lift
GLHLL075	0.75T	1.5 m
GLHLL150	1.5T	1.5 m
GLHLL300	3T	1.5 m

TOHO

Electric Chain Hoists

1-Phase (1 speed)

Models: **TECH0103** (1 tonne x 3m)
TECH0106 (1 tonne x 6m)
TECH0203 (2 tonne x 3m)
TECH0206 (2 tonne x 6m)

3-Phase (2 speed)

Models: **TECH3PH-0106** (1 tonne x 6m)
TECH3PH-0206 (2 tonne x 6m)
TECH3PH-0303 (3 tonne x 3m)

Other lengths available

- Thermal Prevention
- Light weight, compact design with high efficiency motor
- Pressed steel structure, high strength body
- High tensile alloy steel top & bottom hooks
- Grade 80 - 7.1mm Alloy Steel load chain
- Limit switches fitted at top and bottom ends to prevent chain run-out

Lift speed:

1 speed: 1 tonne 6m/min 2 speed: 1 tonne 1.2 / 3.5m/min
2 tonne 3m/min 2 tonne 1.0 / 3.0m/min
3 tonne 1.8 / 5.4m/min

Lift capacity:

1 tonne x 3m - 60kg
1 tonne x 6m - 63.3kg
2 tonne x 3m - 65kg
2 tonne x 6m - 71.6kg
3 tonne x 3m - 122kg



GARRICK

Ute / Small Truck Crane

Model No. UTECRANE500

- Compact, light weight and can be used in confined spaces
- 500/800 kg capacity, when set up with single/double line lifting
- 360 degrees rotation - 3.6 m/min lifting speed
- 12 volt - with 4.2 m switch cable
- Weight: 64kg



TOHO

Compact Wire Rope (Builders) Hoist

Model No. TBH250 (250kg)

Model No. TBH360 (360kg)

Model No. TBH500 (500kg)

- Specifically designed to hang from scaffold tubing to lift materials to and from different levels on a building site.
- 30m lift
- Auto stop feature
- Heavy duty construction
- Scaffolding safety latch
- 240V / 3 pin plug power supply
- 7m pendant length
- Class F Insulation
- IP Rating Hoist: IP44
- IP Rating Corded Control: IP65
- IP Rating Optional Remote Control: IP55



Model	Capacity (Tonne)	Motor (W)	Duty Cycle	Rope Dia. (mm)	Lifting Speed (m/min)	Weight (kg)	Lift (m)	Optional Remote Control
TBH250	250	1500	0.25	5	19	22	30	TBH-RP-250
TBH360	360	1600	0.25	5	13	26	30	TBH-RP-360
TBH5000	500	1600	0.25	6	13	30	30	TBH-RP-500

GARRICK

Load Skate Kit

Part No. LSK-20 (20 tonne capacity total)

Safe and easy to use.


When used with steering handle, gives precise control.

Kits come in its own storage container on wheels.

Spare components available.

- 4pcs roller skates
- 2pcs turntables
- 2pcs packing plates
- 2pcs steering handles
- 2pcs link-up bar
- 1pc draw bar
- 1pc metal box

The individual Skates are rated at 10T each, but used as a kit of 4 pieces, the total capacity is rated at 20T in the event that 2 Skates are carrying the whole load on uneven surfaces, plus the use of turntables, packing plates & bars also reduces possible effective capacity

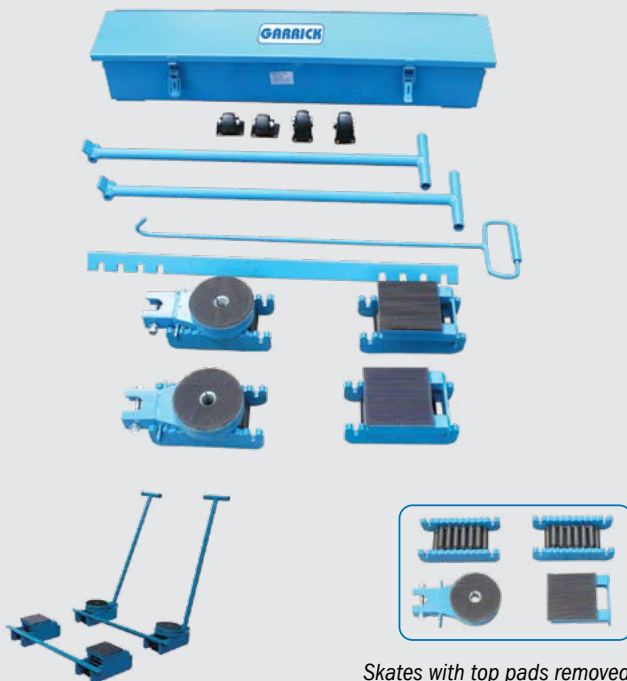

Skates with top pads removed.

Model	Capacity (Tonne)	Length Support (mm)	Width Support (mm)	Total Height (mm)	Roller Diameter (mm)	Swivel Top (mm)	Weight of set (kg)
GLS-20T-KIT	20	120	120	108	18 dia	130 dia	50

Individual Load Skates

Part No. GLS-10T (10 tonne capacity)

- Can be used in multiples to carry heavy loads
- Adaptable to many uses



Model	Capacity (Tonne)	Length Support (mm)	Width Support (mm)	Total Height (mm)	Net Weight (kg)	Gross Weight (kg)
GLS-10T	10	206	100	67	5.2kg	7.3

GARRICK

Push Type Girder Trolleys

Part No. GPT010 (1 T)

Part No. GPT020 (2 T)

- Robust all steel construction
- Adjustable to various beam widths
- Durable stainless steel labels
- Test Certificate and Instruction Manual supplied with every Trolley
- Comply with AS/NZS 4991
- Meet or exceed other International Standards such as GS, CE & ANSI



MODEL	Size	Style	Beam
GPT010	1T	Push	64-210mm
GPT020	2T	Push	88-210mm

Other sizes available on request up to 10 T

GARRICK

Heavy-duty Ratchet Tie Downs

Sizes: GRD25-0.75T (0.75T - 25mm x 5 metre)

GRD35-1.5T (1.5T - 35mm x 6 metre)

GRD50-2.5T (2.5T - 50mm x 9 metre)

- Heavy duty Ratchet Tie Down assemblies for securing loads safely with minimum effort
- Complete with straps hooks and keepers
- Comply with AS/NZS 4380.2001



GARRICK

Universal Chain & Clamp Drum Lifter

Model GDLC

For easy lifting and tilting of 205 L drums.

- Alloy steel chain
- High grade hooks
- Built to industrial standards
- Comply with AS/NZS 1418.2



GARRICK

Round Webbing Slings

- Round Slings manufactured to A.S. 4497.1 - 1997 - Safety Factor 7:1
- WLL (Working Load Limit) is clearly marked on each sling
- Each sling is colour coded to WLL for safety
- Test Certificate supplied with every sling



ROUND SLINGS		
WLL	Length	Part No.
1,000 kg	0.5m	GRS1T0.5M
	1m	GRS1T1M
	1.5m	GRS1T1.5M
	2m	GRS1T2M
	3m	GRS1T3M
	4m	GRS1T4M
2,000 kg	0.5m	GRS2T0.5M
	1m	GRS2T1M
	1.5m	GRS2T1.5M
	2m	GRS2T2M
	3m	GRS2T3M
	4m	GRS2T4M
3,000 kg	5m	GRS2T5M
	1m	GRS3T1M
	2m	GRS3T2M
	3m	GRS3T3M
	4m	GRS3T4M
	5m	GRS3T5M

ROUND SLINGS		
WLL	Length	Part No.
4,000 kg	1m	GRS4T1M
	2m	GRS4T2M
	3m	GRS4T3M
	4m	GRS4T4M
	5m	GRS4T5M
5,000 kg	1m	GRS5T1M
	2m	GRS5T2M
	3m	GRS5T3M
	4m	GRS5T4M
	5m	GRS5T5M

GARRICK

Flat Webbing Slings

- Flat Slings manufactured to A.S. 1353 Parts 1&2 1990 - Safety Factor 8:1
- WLL (Working Load Limit) is clearly marked on each sling
- Each sling is colour coded to WLL for safety
- Test Certificate supplied with every sling



FLAT SLINGS		
WLL	Length	Part No.
1,000 kg	1m	GFS1T1M
	2m	GFS1T2M
	3m	GFS1T3M
	4m	GFS1T4M
	5m	GFS1T5M
	6m	GFS1T6M
2,000 kg	1m	GFS2T1M
	2m	GFS2T2M
	3m	GFS2T3M
	4m	GFS2T4M
	5m	GFS2T5M
	6m	GFS2T6M

FLAT SLINGS		
WLL	Length	Part No.
3,000 kg	1m	GFS3T1M
	2m	GFS3T2M
	3m	GFS3T3M
	4m	GFS3T4M
	5m	GFS3T5M
	6m	GFS3T6M
4,000 kg	2m	GFS4T2M
	3m	GFS4T3M
	4m	GFS4T4M
	5m	GFS4T5M
	6m	GFS4T6M
5,000 kg	2m	GFS5T2M
	3m	GFS5T3M
	4m	GFS5T4M
	5m	GFS5T5M
	6m	GFS5T6M
	8m	GFS5T8M

Pricing & details on other sizes of slings available on request

We are constantly adding to our range of Round and Flat Sling sizes in accordance with demand. The tables above show sizes at time of printing

GARRICK

Pipe Wrenches

Sizes from 14" to 48" - Aluminium / Offset Aluminium / 45° Aluminium

- Straight Aluminium Pipe Wrench**

High strength construction with large capacity jaws and induction hardened teeth to retain sharp edge.



- 45° Offset Aluminium Pipe Wrench**

Light and strong and provides longer swing and better access to hard-to-reach places.



- Spare Parts**

- Such as replacement hook & heel jaws, etc readily available
Parts interchange between models of same size and also suit many opposition brands

Size	Aluminium Pipe Wrench	45° Offset Aluminium Pipe Wrench
14"	PWA-14	PWA-45D-14
18"	PWA-18	PWA-45D-18
24"	PWA-24	-
36"	PWA-36	-
48"	PWA-48	-

GARRICK

Replacement Pipe Cutter Wheels

Part No. 6014-1 (1.1/4" - Size: Dia 25mm x W/13mm x 7mm pin)

Part No. 6002-1 (2" - Size: Dia 30mm x W/19mm x 9mm pin)

Part No. 6015-0 (4" - Size: Dia 40mm x W/28mm x 9.5mm pin)

**GARRICK**

Chain & Strap Wrenches

Strap Wrench

Part No. SW-8 (1" - 8")

High strength aluminium alloy construction with nylon strap for positive grip without marking surfaces.



Chain Wrenches

Reversible Chain Wrench

High strength positive grip for tightening and loosening without removal of chain.



Heavy-duty Chain Wrench

Designed for the most demanding jobs. Double-sided head and quick-release action.



Size	Reversible Chain Wrench	Heavy Duty Tongue Chain Wrench
2-1/2"	-	CW-2.5
4"	CWR-4	CW-4
6"	-	CW-6

GARRICK

Steel Pipe Cutters

Part No. 6042-1 (1.1/4")

Part No. 6050-1 (2")

Precision drop forged steel construction for easy burr-free cutting

- Spring system by washers for a better cut & longer Cutter Wheel life
- Instant cutter wheel change system (no tool required)



Heavy-duty Steel Pipe Cutter

Part No. 6054-1 (4" / 114mm)

Precision drop forged steel construction for easy burr-free cutting

- Spring system by washers for a better cut & longer cutter wheel life
- Instant cutter wheel change system (no tool required)
- Includes a Tommy Bar extension handle on the end of cutter for extra leverage when cutting larger diameter pipes



GARRICK

Tube Cutters

Mini Tube Cutters 3 - 30mm

Part No. 6430-1

Fully adjustable precision tube cutting in limited space.

- Threading of Feed Screw on steel socket
- Instant cutter wheel change system (no tool required)
- Ergonomic knob
- Spare cutter wheel in knob
- On backing card for merchandising



Spare cutter wheel in knob.

Standard No.30 Tube Cutter 3 - 30mm

Part No. 7330-1

Standard economical style of Tube Cutter.

- Threading of Feed Screw on steel socket
- Instant cutter wheel change system (no tool required)
- Ergonomic knob
- On backing card for merchandising



Spare cutter wheel in knob.

Telescopic Tube Cutters

3 sizes:

Part No. 7435-1 (3 - 35mm)

Part No. 7445-1 (3 - 45mm)

Part No. 7476-1 (6 - 76mm)

- Magnesium alloy body for light weight
- Threading of Feed Screw on steel socket
- Instant cutter wheel change system (no tool required) - 4 rollers for a better location of the tube
- Completely removable professional reamer
- Spare cutter wheel on the cap of the knob
- On backing card for merchandising




Spare cutter wheel in knob.

Replacement Tube Cutter Wheel

Part No. 6005-0

Suits all tube cutters.



GARRICK

Internal/External Deburrer

Part No. 6100 (3 - 42mm capacity)

- ABS Body
- Blades made in Solingen, Germany
- Positive, comfortable grip
- On backing card for merchandising



GARRICK

Tube Benders


Professional Tube Benders

Part No. TB-10 (3/8" O.D.)

Part No. TB-12 (1/2" O.D.)

Part No. TB-20 (3/4" O.D.)

- Easier and more accurate to use
- Offset handles and grips for ultimate comfort
- Angle markings for reference to 180°



TB-10



TB-12



TB-20

Multi Tube Bender

Part No. TB-MB

Compact precision bender for tube bending to 180°

- 3 sizes in one tool: 1/4", 5/16", 3/8" O.D.




GARRICK

Tube Springs Set

Part No. TB-SPRING

- One flared end for easy installation and removal
- Will not collapse tube walls during bending
- Made of heavy duty steel spring with nickel finish
- Packaged in durable vinyl sleeve
- Set of 5 sizes - 1/4, 5/16, 3/8, 1/2 & 5/8"

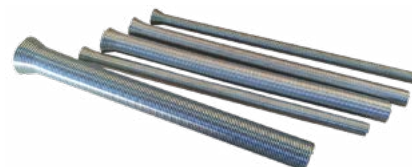



Plastic Pipe Shears

- Easy, straight & precise cut - minimal effort required
- Lightweight but strong Magnesium Alloy diecast body
- Instant cutter wheel change system (no tool required)
- Stainless Steel blade made in Solingen, Germany
- With special edge geometry and PTFE (Teflon) coating for easier cut
- Automatic blade release
- On backing card for merchandising

26mm capacity

Part No. 5026-1



35mm capacity

Part No. 5035-1

- Also has 'V' shaped blade to pierce tube allowing the cut to start easier



42mm capacity

Part No. 5042-1

- Standard attributes PLUS:
- 'V' shaped blade to pierce tube allowing the cut to start easier
- Ratcheting action for easier cutting of the larger diameter
- Quick one-handed blade release



52mm capacity

Part No. 5050-1

- Standard attributes PLUS:
- 'V' shaped blade to pierce tube allowing the cut to start easier
- Ratcheting action for easier cutting of the larger diameter
- Quick one-handed blade release
- Rubber comfort cushion grip on handle



63mm capacity

Part No. 5063-1

- Standard attributes PLUS:
- 'V' shaped blade to pierce tube allowing the cut to start easier
- Ratcheting action for easier cutting of the larger diameter
- Quick one-handed blade release
- Rubber comfort cushion grip on handle



GARRICK

Flaring Tools

Universal Flaring Tool

Part No. FT-U

- Unique economic self-adjusting flaring tool
- Compact & easy to use, with innovative tube holding mechanism



Refrigerant Flaring Tool Kit

Part No. FT-HDE

- 45° flares on standard copper or tougher materials such as mild steel, stainless steel & R410 gas compliant copper
- Eccentric cone enables easier operation
- 1/4, 5/16, 3/8, 1/2, 5/8, 3/4



Double Flaring Tool Kit

Part No. FT-DFS

- 45° single or double flares
- Includes flaring tool, 7x double flare attachments & Tube Cutter
- 3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8



GARRICK

Expander Kit

Part No. CT-100M

- Single-stage expanders designed to expand tubing for fast, accurate joints in soft copper, aluminium and soft steel tube without using fittings.
 - The mechanism is free-floating and self-centring
- Sizes: 12, 19, 25 & 27mm



GARRICK

Portable Power Pipe Threaders

Part No. PPT2 (1/2" - 2")

- Designed for versatile power threading without a vice
- Suitable for "on-site" applications
- Threads at 15-25 rpm with 60 rpm geared reverse
- Supplied with die-heads 1/2", 3/4", 1", 1.1/4", 1.1/2", 2"
- Robust carrying case



GARRICK

Quick Release Chain Vices

Part No. CV2.5 (1/2 - 2.1/2" capacity)

Part No. CV6 (2.1/2 - 6" capacity)

- With lever action to tighten or release the chain
- Easily adapts to stands and work benches
- Forged steel jaws
- Cast iron base



GARRICK

Portable Work Stand

Part No. TSCV

- Includes chain pipe vice
- Collapsible workbench in aluminium
- Can be used with any kind of pipe
- Includes tray fold in for easy carrying and setup
- Includes slots for hanging tools



BRAMLEY**Chassis Hole Punches****- for Mild Steel & Stainless Steel**

For cutting precision holes in sheet or panel, eliminating distortion to deliver a superior finish.

Model 010SET

(set of 6 popular sizes) 16, 20, 22, 25.4, 32 & 35 mm)

1/2" - 2" individual sizes available

- New 3 point design on punch for easier cutting
- New packaging
- Upgraded tool steel specification for increased life & performance
- Cut Stainless Steel more easily than previous design
- For simple cutting of neat holes in sheetmetal

Simple to use:

1. Drill a hole 1mm (1/32") larger than drive screw
2. Insert screw through die
3. Place screw through hole in metal & screw on punch
4. Turn drive screw with spanner or wrench until metal is cut

3 point
design for
easier cutting



Individual protective packaging



Set of 6

MODEL	Size	Capacity Mild Steel	Capacity Stainless Steel	Bolt Thread
010-12.5	1/2" (12.5mm)	2mm	1.6mm	M8 x 1.0
010-16	5/8" (16mm)	2mm	1.6mm	M8 x 1.0
010-19	3/4" (19mm)	2mm	1.6mm	M10 x 1.25
010-20	20mm	2mm	1.6mm	M10 x 1.25
010-22	7/8" (22mm)	2mm	1.6mm	M10 x 1.25
010-25.5	1" (25.5mm)	2mm	1.6mm	M12 x 1.25
010-28.5	1-1/8" (28.5mm)	2.5mm	2mm	M12 x 1.25
010-30	1-3/16" (30mm)	2.5mm	2mm	M12 x 1.25
010-32	1-1/4" (32mm)	2.5mm	2mm	M12 x 1.25
010-35	1-3/8" (35mm)	2.5mm	2mm	M12 x 1.25
010-38	1-1/2" (38mm)	2.5mm	2mm	M12 x 1.25
010-41.5	1-5/8" (41.5mm)	2.5mm	2mm	M20 x 1.5
010-44.5	1-3/4" (44.5mm)	2.5mm	2mm	M20 x 1.5
010-48	1-7/8" (48mm)	2.5mm	2mm	M20 x 1.5
010-51	2" (51mm)	2.5mm	2mm	M20 x 1.5

GARRICK**Portable Work Stand****Part No. TSCV**

- Includes chain pipe vice
- Collapsible workbench in aluminium
- Can be used with any kind of pipe
- Includes tray fold in for easy carrying and setup
- Includes slots for hanging tools

**GARRICK****Hand Ratchet Pipe Threaders****Part No. HRT100 (1/2" - 1" BSPT)****Part No. HRT125 (1/2" - 1.1/4" BSPT)****Part No. HRT200 (1/2" - 2" BSPT)**

- Long life HSS dies with "Easy Start" lead chamfer
- NPT dies available
- Supplied in robust carry case



HRT125



HRT100



HRT200

GARRICK

5" Portable Bandsaw

Model BS125

Suitable for steel, non-ferrous, plastics, wood etc:

- Constructed for easy portable use
- Only 20kg weight for easy & practical transport
- Strong and sturdy enough for stable work, but small enough to fit in car or ute
- Electronic infinitely variable speed
- Solid and stable base.
- From 0° to 45° adjustable cutting angle
- No cutting lubrication required



MODEL	BS125
Motor	1.5kW DC
Blade Size (mm)	1136 x 12 x 0.65
Blade Speed (m/min)	20 - 70
Vice Tilt	0° - 60°
Cutting Capacity at 90°	● 125mm ■ 130 x 125mm
Cutting Capacity at 45°	● 76mm ■ 76 x 76mm
Carton Dimensions (mm)	550 x 370 x 400
Weight (kg) - Nett / Gross	20 / 21



#BSSTAND Accessory Table
Stand available separately

GARRICK

Manual Pressure Test Pump

Part No. TPRP50

- Durable, precision unit for accurately testing all tube/pipe systems & pressure vessels. Working parts rust-proofed, 12L tank is galvanised, epoxy coated.
- Large capacity pressure testing pump
- Double check valves with stainless steel ball seats
- Accurate readings up to 50 bar / 700 psi
- 12 litre tank capacity



Asada

Reciprocating Pipe Saw

Part No. PS200SP

- Lightweight (3.9kg) - suitable for on-site, high or overhead jobs
- Powerful 1300W (2HP) electric motor
- Supplied with chain vice for easy use and square cuts
- HSS, Super HSS (Cobalt) & Bi-metal Bladed available



Replacement Blades

- Super HSS Bimetal

Part No. PS200PS-BLADE - Asada 61371 HSS 200mm x 8 TPI

Part No. PS270PS-BLADE - Asada 61505 HSS 270mm x 8 TPI



GARRICK

Brazing & Soldering Torch

Part No. TORCH-MAPP

- For use with MAPP or Propane gas
- Piezo ignition for instant flame
- Safety lock
- Ignition button lock
- Replaceable tip
- Anti-flare reliability even when inverted



Warranty & Terms of Sale

Limited Warranty

All products manufactured by R.R. Bramley & Co Ltd are warranted against defects in workmanship and/or materials and will be repaired or replaced (at the sole discretion of R.R. Bramley & Co. Ltd) within twelve months of the date of original purchase, subject to fair wear and tear and correct use for their intended purpose.

Terms of Sale

GST	Unless otherwise stated, all quoted prices are exclusive of GST.
FREIGHT	Unless otherwise stated, all prices are exclusive of freight. All prices quoted are based on F.O.T., Mt Wellington, Auckland, New Zealand.
RETURNS OR CLAIMS	No claim relating to products will be considered unless made in writing within 10 days of delivery. Products returned for credit will only be accepted with prior written consent authorisation from RR Bramley Ltd. Authorised returns will be subject to a handling fee of no less than \$25.00, and up to 15% (fifteen percent) of the returned goods value.
INSURANCE	All risk in the product passes to the customer on delivery. Delivery of the product(s) is treated as completed when RR Bramley Ltd gives possession directly to the customer, or given to a carrier for transmission to the customer.

A

Abrasive Belts & Discs	22
Abrasive (Linishing) Belts	22

B

Bandsaw Blades	13
Bandsaws	12
Bar Benders	4
Beaver 50 Trolley Cart	23
Belt & Disc Grinding Attachment	19
Belt Grinders	19, 20, 22
Belt Grinding Attachments	19
Belt Grinding Machines	
Bench-mounted	21
Pedestal-mounted	21
Bench Grinder Accessories	
Mitre Table	20
Pedestal	20
Bench Grinders	18, 20
Bench Punch	
Hand Lever	11
Benders	
Bar	4
Pipe	4
Rod	8
Tube - Hand	32
Tube - Hydraulic	5
Benders - Pool Fence	8
Bolt Threaders	23
Box & Pan Sheetmetal Folder	8
Bench Mounted	8
With Stand	8
Brazing & Soldering Torch	36
Buff or Polishing Guard	20
Builders Hoist	28

C

Chain Blocks	27
Chain & Clamp Drum Lifter	29
Chain Hoists	28
Chain Vice	25, 34
Chain Wrenches	31
Chassis Hole Punches	9, 35
Circular Cold-Cut Sawblades	14
Circular Cold-Cut Saws	14
Cold-cut Saws	14
Contact Wheels	
Rubber	21
Conveyor Roller Tables	11
Crane	
Ute / Small Truck	28
Curving Rolls	
Bench	9
Sheetmetal	9

D

Deburrer	32
Double Flaring Tool Kit	34
Drain Cleaner	36
Drill Drift	15, 17
Drill Presses	15, 16
Drum Lifter	29

E

Electric Chain Hoists	28
Electric Hydraulic Pipe Bender	4
Expander Kits	34

F

Flaring Tools	34
Folders	8
Fully Optioned Wrought Iron Bender	7

G

Geared Head Industrial Machine Drills	17
Girder Trolley	29
Grinder / Notcher	22
Grinders	
Accessories	20, 22
Belt (Linisher)	19, 21, 22
Bench	18, 21
Grinding Wheels	22
Guillotine	
Hand Lever Shears	11

H

Hand Ratchet Pipe Threaders	25, 35
Hoist	
Wire Rope / Builders	28
Hook & Loop Converter Pack	22
HSS Circular Sawblades	14

L

Lever Hoists	27
Linishers	19, 21, 22
Load Skate Kit	29

M

Machine Drills	17
Manual Hydraulic Pipe Bender	4
Manual Pressure Test Pump	36
Multi Tube Bender	32

N

Nipple Chuck Accessory	25
------------------------	----

O

Oil	
Threading	24

Index to Products

P

Pedestal-mounted Belt Grinding Machines	21
Picket & Basket Twister Attachment	7
Pipe	
Benders	4
Cutters	31
Notcher	6
Stand	25
Threaders	23, 25, 34
Wrenches	31
Pipe Bender Attachment	6
Pipe & Bolt Threading Machines	23
Pipe Cutter Blades	24, 31
Pipe Cutters	31
Pipe Notcher Attachment	6
Plastic Pipe Shears	33
Polisher	20
Pool Fence Tube Bender	8
Portable Bandsaw	12, 36
Portable Power Pipe Threaders	25, 34
Portable Work Stand	25, 34, 35
Power Drive	26
Powered Bender	
Pipe Bender Attachment	6
Rebar Bending Attachment	6
Standard Unit	6
ProBender 35t	6
ProBender 35t Accessories	6
Professional Tube Benders	32
Punches	
Chassis Hole Punches	9, 35
Hand Lever	11
Push Type Girder Trolley	29

Q

Quick Release Chain Vice	25, 34
--------------------------	--------

R

Ratchet Tie Downs	29
Rebar Bending Attachment	6
Reciprocating Pipe Saw	36
Refrigerant Flaring Tool Kit	34
Replacement Bandsaw Blades	13
Rod Bender	8
Rod/Bolt Threading Machine	24
Roller Stands	11
Roll Groover	26
Roll Grooving Attachment	26
Rolls - Curving	9
Rubber Contact Wheels	21

S

Sawblades	14
Saws	
Band	13
Circular Cold-cut	14
Scroll Bender Attachment	7

Shears

Hand Lever	11
Sheetmetal	
Curving Rolls	9
Punches - Chassis Hole	9, 35
Punch - Hand Lever	11
Shears - Hand Lever	11
Swage, Jenny & Wiring Machines	10
Sheetmetal Curving Rolls	9
Slings	
Flat Webbing	30
Round	30
Round Webbing	30
Stands	
Bar Bender	4
Bench Grinder	20
Pipe	25
Roller	11
Strap Wrenches	31
Swage, Jenny & Wiring Machines	10

T

Taper Spindles	20
Threaders	23
Threader Trolley Cart	23
Threading Dies & Spare Parts	24
Threading Machine	
Pipe & Bolt	23
Rod & Bolt	24
Trolley Cart	23
Threading Oil	24
Tie Downs	29
Torch	
MAPP	36
Trolleys	29
Tube Benders	
Electric	5
Hand	32
Hydraulic	5
Pool Fence	8
Tube Cutters	32
Tube Springs Set	32

U

Universal Flaring Tool	34
Universal Thin Wall Tube Bender	5
Ute Crane	28

W

Wire Rope Hoist	28
Wire Wheels	22
Wrenches	
Chain & Strap	31
Pipe	31
Wright Linisher	21
Wrought Iron Scroll Bender Attachment	7

BRAMLEY



Find us on
Facebook

R.R. Bramley & Co. Ltd

Address: 184 Marua Rd, Mt Wellington,
Auckland

Postal: P.O. Box 14-114, Panmure,
Auckland 1741

Ph: (09) 579 2036

Fax: (09) 525 0735

Email: sales@bramley.co.nz

Website: www.bramley.co.nz

DISCLAIMER: Images in this brochure are representative only. Please confirm all product specifications when ordering. Models available may vary without notice.