

PASSENGER & LIGHT COMMERCIAL VEHICLE



WORKSHOP EQUIPMENT & FITOUT SPECIALS

1st May - 31st July 2026

RAVAGLIOLI 3D Wheel Aligner

The Ravaglioli **RAV3DTOWER.4** 3D Wheel Aligner is an advanced wheel aligner utilising leading European hardware & software technology. The perfect balance of convenience, ease of use, performance and long-lasting quality.

2
YEAR
WARRANTY

NEW

SPECIFICATIONS, FEATURES & BENEFITS

- Compact targets with no electronics & batteries
- Wheel alignment software & database for CARS
- Large 22" LCD display
- Compact open style cabinet
- Ergonomic design & easy accessibility during maintenance operations
- WiFi connection for automatic software updates
- Data management & display program in the Windows environment
- Four 4-point clamps with universal grips & targets
- Automatic Tower Movement
- Supplied with two mechanical turntables for cars, brake pedal depressor & steering wheel holder
- Made in Italy 🇮🇹



Wheel Aligners

9



2 Post Hoists

10



LED Workshop Lights

20

COMBO
DEALS

Page

3

SUPER SAVINGS Alemlube Mega Equipment Catalogue



*Applies to the vast majority of Alemlube products unless otherwise stated. All prices exclude GST & vehicle hoist installation costs.

MEASUREMENTS IN A BLINK

18 MONTH WARRANTY

NEW

The **AAPTWAN** Alemlube Automotive Premium ARGOS X Touchless Wheel Alignment System will improve workshop efficiencies dramatically & increase your business by saving time



- Measuring in a blink - Measure toe & camber in less than 5 seconds
- Measuring process automatically starts at the arrival of the vehicle
- Instant touchless measurement without exiting the vehicle
- No manual adjustments for cars with different wheelbases
- No brake pedal required to measure caster
- Automatic locking & unlocking turntables
- No obstructions around lift or wheels
- No moving parts, no bulky cabinet
- Remote vehicle specs selection
- No clamps, targets or sensors
- Rim run-out not compulsory
- No need to remove hubcaps
- Fitting to every type of lift or pit for touchless wheel alignment
- Camera support for the positioning of vehicles on the turntables
- Eliminate any effort & time for aligner's measurements
- Automatic pre-selection of vehicles' specifications
- Thorough check all your customers' vehicles
- Find out more vehicles that need adjustments
- Increase turnover & customers' satisfaction
- Remote software control & measurements visualisation
- Made in Italy

The Federal Government announced for the 2025-26 income year, the instant asset write off threshold will remain at \$20,000 but will not continue onwards after 30 June 2026.

"So now is the time" to consider purchasing workshop equipment to take advantage of the new instant asset write-off! Eligible Small businesses, with aggregated turnover of less than \$10 million, will be able to immediately deduct the full cost of eligible assets costing less than \$20,000 that are first used or installed ready for use between 1 July 2025 and 30 June 2026. Take advantage of the Tax break without affecting your cash flow with Asset finance available to approved customers!

To find out more about the Federal Governments Small Business Support package, head to www.ato.gov.au Please consult your Accountant, Financial Advisor or the ATO for eligibility & criteria for the instant asset write off.



AA201

Alemlube Automotive Semi Automatic Swing Arm Tyre Changer

1 YEAR WARRANTY

- Semi automatic side swing arm
- Large 24" turntable suitable for low profile tyres
- Shovel with blade protector ensures bead breaking without damaging the rim or tyre
- Maximum rim width 14" (355mm)
- Maximum tyre diameter 39" (1,000mm)
- Air supply 116psi (8bar)
- 12" - 24" internal clamping & 10" - 21" external clamping
- Space saving design



AATCMB4

Alemlube Automotive Tyre Changer Motorbike Adaptor Kit

1 YEAR WARRANTY

AAWBMCA-40MM

Alemlube Automotive Unit Wheel Balancer Motorbike Adaptor

1 YEAR WARRANTY



MOTORBIKE COMBO DEAL

AAPCOMBODEAL8
AA201 / AATCMB4 / AA820 / AAWBMCA-40MM

AA820

Alemlube Automotive Wheel Balancer with LED Monitor

1 YEAR WARRANTY

- Highly accurate integrated circuit, self-calibration and diagnostic functions • LED numeric display screen
- Automatic distance and wheel diameter measuring
- Rim width from 1.5" - 20"
- Rim diameter from 10" - 24"
- Maximum wheel weight of 65kg
- Measuring time of 8 seconds
- Balancing accuracy of $\pm 1.0g$



AAPTC27HA

Alemlube Automotive Premium 27" Tilt Back Tyre Changer

18 MONTH WARRANTY

- Internal clamping capacity of 10" - 27"
- Maximum tyre diameter 43" (1,092mm)
- Maximum rim width 15" (381mm)
- 2 position adjustable jaws
- Double-speed system with pedal control
- Includes Helper Arm
- Under table inflation
- Made in Germany



AAPWB220V

Alemlube Automotive Premium Megaspin Compact Digital + Video Wheel Balancer

18 MONTH WARRANTY

- Rim width setting range 1.5" to 20"
- Rim diameter setting range 10" to 30"
- Single phase power supply 230V, 50Hz
- Measuring cycle for 15kg wheel 4.7 seconds
- Balancing speed 100rpm
- Software programs Virtual Sonar & Laser Line
- Maximum air pressure 145psi
- Maximum wheel weight 75kg
- Machine weight 110kg
- Made in Germany



COMBO DEAL

AAPCOMBODEAL6:
AAPWB220V / AAPTC27HA

HOSE REELS

Warranty on all Rewinda Reels:
REWINDA
Wearing Components 2 YEAR WARRANTY
Materials & Workmanship 10 YEAR WARRANTY

AR1220CAB Rewinda Compressed Air Hose Reel - 20m x 12mm ID

- 1/2" BSPT(m) inlet/outlet connections
- 1/2" BSPT(f) hose reel inlet thread
- Maximum working pressure of 300 psi (20bar)
- Working temperature of -40°C to +80°C
- Dimensions of 580mm (L) x 480mm (H) x 270mm (W)
- Weight of 14kg



Also Available
AR1220CAR as above
but in red

AR1020CAB Rewinda Compressed Air Hose Reel - 20m x 10mm ID

- 1/2" BSPT(m) inlet/outlet connections
- 1/2" BSPT(f) hose reel inlet thread
- Maximum working pressure of 300 psi (20bar)
- Working temperature of -40°C to +80°C
- Dimensions of 580mm (L) x 480mm (H) x 270mm (W)
- Weight of 14kg



Also Available
AR1020CAR as above
but in red

AR30CBRY Rewinda Caution Safety Barrier Reel

- 30m x 48mm yellow & black caution band with fixed handle
- High grade impact resistant UV stabilised covers
- Detachable steel mounting bracket enables 180° reel rotation
- Fixed handle easily attaches to any suitable fixing point
- Dimensions of 580mm (L) x 480mm (H) x 270mm (W)
- Weight of 9.4kg



Also Available **AR30DBRR**
in Red Danger Barrier

AR615OPR Rewinda Oxy Propane Twin Hose Reel - 15m x 6mm ID

- Designed exclusively for using with Oxy Propane, this fully serviceable reel complies with increase WHS requirements
- 5/8" UNF(f) left & 5/8" UNF(f) right connections
- 5/8" UNF(m) hose reel inlet thread
- Maximum working pressure of 300psi (20bar)
- Working temperature of -20°C to +60°C
- Weight of 16kg



AR615OAR Rewinda Oxy Acetylene Twin Hose Reel - 15m x 6mm ID

- Designed exclusively for using with Oxy Acetylene, this fully serviceable reel complies with increase WHS requirements
- 5/8" UNF(f) left & 5/8" UNF(f) right connections
- 5/8" UNF(m) hose reel inlet thread
- Maximum working pressure of 300psi (20bar)
- Working temperature of -20°C to +60°C
- Weight of 16kg



AR1225GWC Rewinda Garden Water Hose Reel - 25m x 12mm ID

- Quick Connector (f) outlet with adjustable spray nozzle
- Automatic & positive latching mechanism with speed control brake system
- 3/4" BSP(f) hose reel inlet thread
- Maximum working pressure of 150psi (10bar)
- Working temperature of 0°C to +60°C
- Dimensions of 490mm (L) x 580mm (H) x 260mm (W)
- Weight of 13kg



AR1220CAWB Rewinda Compressed Air & Water Hose Reel - 20m x 12mm ID

- 1/2" BSPT(m) inlet/outlet connections
- 1/2" BSPT(f) hose reel inlet thread
- Maximum working pressure of 300psi (20bar)
- Working temperature of 0°C to +60°C
- Dimensions of 590mm (L) x 480mm (H) x 270mm (W)
- Weight of 13kg



AR1020CAWB Rewinda Compressed Air & Water Hose Reel - 20m x 10mm ID

- 1/2" BSPT(m) inlet/outlet connections
- 1/2" BSPT(f) hose reel inlet thread
- Maximum working pressure of 300psi (20bar)
- Working temperature of 0°C to +60°C
- Dimensions of 590mm (L) x 480mm (H) x 270mm (W)
- Weight of 13kg



AR1215OB Rewinda Oil Hose Reel - 15m x 12mm ID

- High pressure SAE 100R1 AT wire braid hose
- High grade impact resistant UV stabilised covers
- 1/2" BSP(f) inlet & 1/2" BSPT(m) outlet connections
- 1/2" BSP(f) hose reel inlet thread
- Maximum working pressure of 2,320 psi (160bar)
- Working temperature of -40°C to +100°C
- Dimensions of 490mm (L) x 580mm (H) x 260mm (W)
- Weight of 17kg



AR1524020CRR Rewinda Electrical Cable Reel - 20m x 240V 15Amp

- For indoor use with workshop applications such as column lifts, TIG & IMIG welding machines and heavy duty refrigeration
- Australian Standard compliant in accordance with AS/NZS 3000
- H07RN-F heavy duty rubber electrical power cable
- Dimensions of 390mm (L) x 410mm (H) x 200mm (W)
- Weight of 13kg



AR1024020CRR Rewinda Electrical Cable Reel - 20m x 240V 10Amp

- For indoor use with workshop applications such as column lifts, TIG & IMIG welding machines and heavy duty refrigeration
- Australian Standard compliant in accordance with AS/NZS 3000
- H07RN-F heavy duty rubber electrical power cable
- Dimensions of 390mm (L) x 410mm (H) x 200mm (W)
- Weight of 13kg



EVRP2405 Alemlube 240V 10amp EV Charging Cable Reel

- 240V electric vehicle charging cable reel
- 1 + 4m automatic spring rewind
- Complete with Type 2 connectors
- Manually restorable circuit breaker
- Inbuilt thermostat
- 3G 2.5 + 1 x 0.5 charging cable
- Coiled: 3.6kw, 16amp
- Uncoiled: 4.6kw, 20amp
- CE Approved & Australian standards compliant
- Dimensions of 315mm (W) x 315mm (H) x 200mm (D)
- Weight of 4.8kg



MISCELLANEOUS EQUIPMENT

AA49010 Alemlube Automotive 1.2t Lifting Table

- Pneumatic operation
- Multi-angle & multi-direction lifting table
- Capacity 1,200kg
- Rest Height 480mm
- Lifting Height 1,810mm
- Platform Width 770mm
- Platform Length 1,300mm



Also Available
in new model **AA49020**
Battery Operated


AAFQ1500 Alemlube Automotive 1.5t Lifting Table

- Pneumatic operation
- Multi-angle & multi-direction lifting table
- Capacity 1,500kg
- Rest Height 480mm
- Lifting Height 1,810mm
- Platform Width 770mm
- Platform Length 1,300mm



AA49010-MG15F Alemlube Automotive Lifting Table Accessories

- Assists with the removal of engines & transmissions
- Increases safety in the workshop
- One set includes 8 adaptors, 4 with a rubber head & 4 without

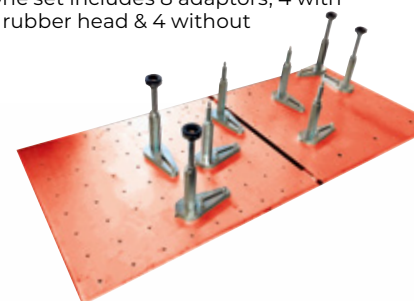

AA49020-R Alemlube Automotive Rubber Isolation Pad

- Thickness of 3mm



AA49020-PVC Alemlube Automotive PVC Isolation Pad

- Thickness of 8mm




AA48020 Alemlube Automotive 24V Battery Operated Wheel Lift

- Light weight aluminium alloy body for ease of mobility
- Maximum lifting weight 80kg
- Lifting height 0 to 1.2m
- Lifting time 12 to 16 seconds
- Lifting precision of 2mm
- Lifts per charge 150 to 200
- Motor power 200W
- Motor Voltage 24V
- 2 x 12V 9AH batteries
- Wheel bracket angle adjustment
- Control panel with Emergency Stop
- Safety tyre hook
- Ergonomic handle
- Dimensions: 700mm (W) x 740mm (D) x 1,630mm (H)



AA48010 Alemlube Automotive Express Maintenance Service Trolley

- Supplied complete with a Wheel Transport Trolley & a Brake Bleeder
- Fitted with 4 flexible air hoses with air fittings
- Designed for express maintenance
- Increases potential servicing from 5 cars per bay to 13 cars per bay
- S4991-2004 approved
- OEM manufacture approved
- Approved by Toyota Australia
- 3 handy tool trays & a large work platform for pneumatic tools
- Dimensions of 760mm (L) x 820mm (W) x 1,200mm (H)
- Weight 64kg

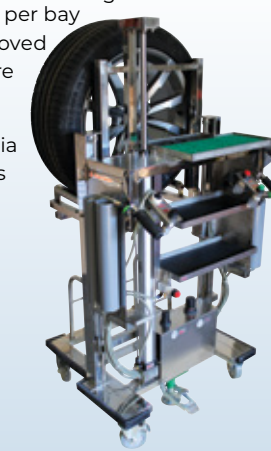

AATC180 Alemlube Automotive Topside Creeper 180kg

- Built with a heavy-duty steel frame that can support up to 180kg
- Complete with ant-slip platform steps
- Equipped with 4 x 75mm swivel casters (2 lockable) with 2 supporting feet for extra stability
- Includes a 47cm x 45cm x 30cm x 4cm thick padded top deck
- Adjustable creeper height with 5 positions
- Maximum height 180cm Minimum 120cm
- Angle adjustment with 3 positions
- Handy pocket for small tools, nuts, bolts etc



For ordering, please contact your local Alemlube distributor.

4 POST HOISTS & SCISSOR LIFTS

RAV4401

Ravaglioli

4.0t Electro-Hydraulic 4-Post Vehicle Hoist

- Adjustable platforms to accommodate varying vehicle widths
- Automatic mechanical back up safety devices with pneumatic release allow for stationary operation with loaded cables
- Immediately triggered safety stud devices operate in the event of a cable slackening or failing
- An automatic anti-toe trapping alarm during the final stages of vehicle hoist decent supplied standard
- Made in Italy

Also Available **RAV4402** 4.0t 4-Post Wheel Alignment Hoist



2
YEAR
WARRANTY

RAV4501L

Ravaglioli

5.0t Electro-Hydraulic 4-Post Vehicle Hoist

- Long 5,700mm platform with adjustable width
- Automatic mechanical backup safety devices with pneumatic release
- Automatic anti toe trap alarm during final stages of lift descent
- Mechanical, electrical & hydraulic safety devices in compliance with the prevailing standard for CE marking
- Made in Italy

Also Available **RAV4502L** Extra-long platforms for total wheel alignment with front turning plates locations and rear slip plates




2
YEAR
WARRANTY

AAP684PA

Alemlube Automotive Premium 4P 6.8t Wheel Alignment Hoist

- Lifting capacity 6.8 tonne
- Wheel alignment capable as includes recesses for wheel alignment turntables & includes rear slip plates
- Includes turntable recess cover plates if not used for wheel alignments
- Available in Anthracite Grey RAL7016
- Total height 2,290mm, total width 3,346mm
- Drive through width 2,810mm
- Platform width 562mm, platform length 5,070mm
- Total length including ramp 6,360mm
- Width between platforms 800mm - 1,150mm
- Lifting height 200mm - 1,850mm
- Lifting time 50 seconds, lowering time 60 seconds
- Air operated safety lock system
- Voltage - 415V 3 phase with 240V single phase available upon request
- Gross weight 1,500kg
- CE approved

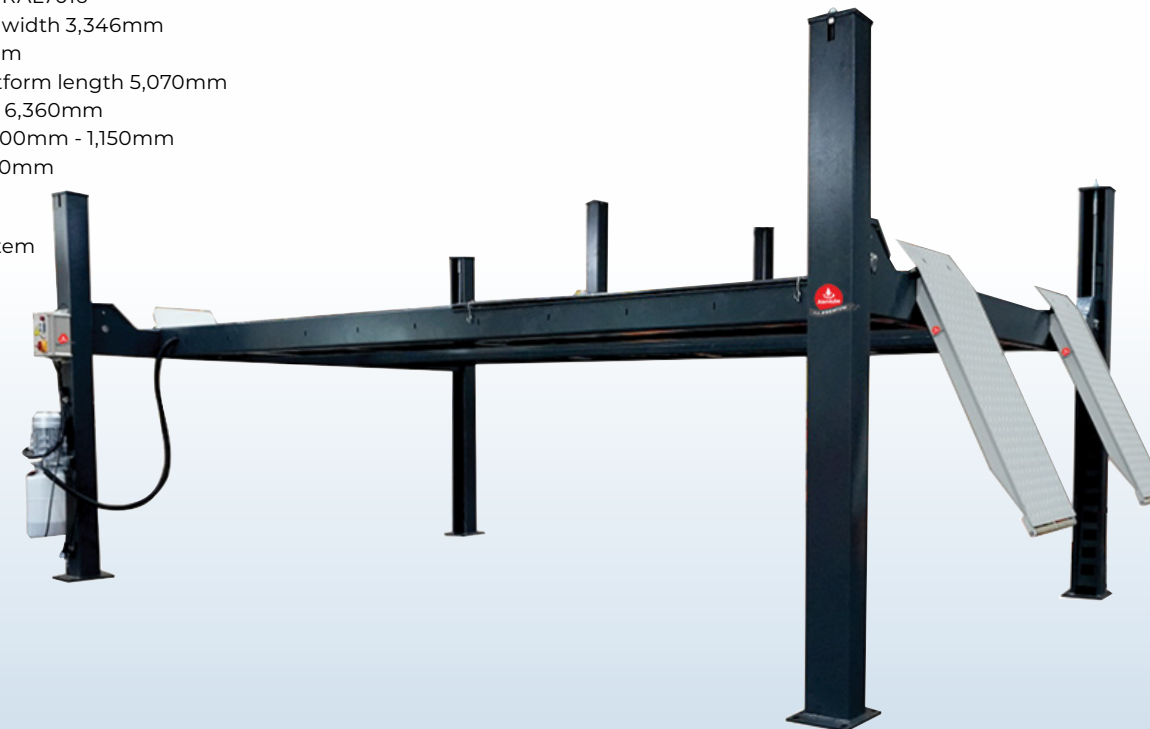

18
MONTH
WARRANTY

AA454PAN

Alemlube Automotive

4.5t 4-Post Alignment Hoist

- Heavy duty lifting capacity of 4,500kg
- Maximum lifting height of 1,896mm
- Minimum lowered height of 246mm
- Overall length of 6,288mm
- Overall width of 3,342mm
- Width between columns of 2,742mm
- Conventional 4-post hoist designed for general under vehicle service & specialist exhaust system operations

1
YEAR
WARRANTY

AA35S

Alemlube Automotive

3.5t Low Profile Full Rise Scissor Lift

- 3,500kg lifting capacity
- Lifting height 1,930mm
- Minimum lifting height 105mm
- Lifting time 60 seconds
- Lowering time 20 seconds
- Available in single phase or three phase
- Platform size 1,485mm x 2,035mm x 660mm
- 4 x Reinforced oil cylinders with German seals
- Weight 820kg

Also Available **AA35S-240V**



1
YEAR
WARRANTY

AA35MRS

Alemlube Automotive

3.5t Low Profile Mid Rise Scissor Lift

- 3,500kg lifting capacity
- Lifting height 1,000mm
- Minimum lifting height 105mm
- Lifting time 40 seconds
- Lowering time 20 seconds
- Platform size 1,400mm (W) x 1,974mm (L) x 480mm (D)
- 4 x Reinforced oil cylinders with German seals
- 240V 15AMP
- Weight 650kg



1
YEAR
WARRANTY

RAV535

Ravaglioli

3.5t Low Profile Full Rise Scissor Lift

- Minimum height 100mm
- No cross rails or torsion bars between the lifting platforms ensures clear access to the underside of the vehicle
- Mechanical locking device with automatic engagement & pneumatic release, ensuring maximum safety when lift is in standing position
- Ideal for space saving in small, medium or large workshops
- Made in Italy

2
YEAR
WARRANTY



WHEEL ALIGNMENT SCISSOR LIFTS

WHEEL ALIGNERS

RAV640N.2I

Ravaglioli 4.2t Wheel Alignment Scissor Lift

- Large size platforms & sturdy structure assuring maximum rigidity and working stability
- Platforms for total wheel alignment, with front turning plates locations & rear slip plates
- Rear slip plates with pneumatic locking in true position, angular & transversal movements in both directions
- Audible alarm during final lowering stage
- Made in Italy 



Also Available **JS20PR** Jacking Beam to suit RAV640N.2I
Also Available **S600NAT1** Above Ground Installation Kit

AA45LPAS

Alemlube Automotive 4.5t Low Profile Motor Vehicle Alignment Scissor Lift

- Low profile scissor lift designed for precise wheel alignment procedures & general under vehicle service operations
- Cost saving 'on ground' installation
- Integrated rear wheel slip-plates
- Heavy duty lifting capacity of 4,500kg
- Maximum lifting height of 1860mm
- Minimum lowered height of 180mm
- Overall length 6,500mm
- Overall width 2,070mm
- Platform width 635mm (each)
- Width between platforms 800mm
- Air operated safety lock system
- Quality components throughout including Italian made hydraulic pumps



Also Available **AA30PJB** Jacking Beam to suit AA45LPAS

AAP50WASLI

Alemlube Automotive Premium 5.0t Wheel Alignment Scissor Lift

- Designed for precise wheel alignment procedures & general under vehicle service operations
- Comes standard for inground installation, optional above ground installation kit is available
- Integrated rear wheel slip-plates
- Heavy duty lifting capacity of 5,000kg
- Maximum lifting height of 2,160mm
- Minimum lowered height of 310mm
- Runway length 5,000mm
- Overall width 2,089mm
- Platform width 608mm (each)
- Width between platforms 873mm
- Mechanical locks with automatic engagement & release
- Turntable recess covers included as standard
- One jacking beam included as standard
- Manual emergency lowering



Also Available **AAP25PJB** Extra Jacking Beam to suit AAP50WASLI

Also Available **AAP50WASL-AGIK** Above Ground Installation Kit



COMING
SOON

RAV3D2.OWALL3S

Ravaglioli All On Wall Series 3D Wheel Aligner

The All On Wall series allows you to have all that is necessary for performing wheel alignment operations to be placed on a convenient wall-mounted panel, in this way freeing up useful space in the workshop. All alignment activities can be controlled from a 10" tablet that the operator can carry with him or place on the lifter during adjustment thanks to the built-in magnets. The aligner boasts a well-tested measuring head technology with HD cameras and Real 3D target that is fully wireless with Bluetooth transmission.

- Wall mounted console supports measuring heads, batteries & tablet
- Set of 4 self-centring 3-point clamps requiring no compensation
- No console, or tower taking up valuable workshop space
- Batteries & Tablet are charged on wall mounted console
- Wall mounted brackets support wheel clamps targets when not in use
- Long lasting batteries with 8 hours use
- Wi-Fi tablet controlled 3D wheel aligner
- Totally PC free
- Fully wireless 
- Made in Italy 



HOT
PRICE

RAVTD3200HPR.3

Ravaglioli Premium 3D Wheel Aligner

The RAVTD3200HPR.3 Series is an innovative system of totally wireless 3D cameras with Bluetooth transmission can be used on different types of hoists.

SUITS ANY 4 POST HOIST OR ALIGNMENT SCISSOR LIFT

- 3DT® Target – extremely light, no electronic components inside & maintenance free
- Automatic lift level compensation
- Bluetooth transmission between measuring heads & control unit
- Equipped with tyre grabbing 3-point clamps to avoid run out compensation
- Wi-Fi dongle & ADAS ready
- 2 years free data updates
- Made in Italy 



RAVTD2.0WIFI

Ravaglioli 8CCD All-On-Wall Wheel Alignment System

- Wall mounted wheel alignment system saving space & using a wall mounted tablet with wall mounted measuring heads
- 8 CCD cameras with sensors used. The charged coupled devices accurately measure all alignment parameters
- Two wall mounted panels for recharging the measuring heads & a USB port for charging the tablet



Ease of use tablet features

- Operators monitor wheel alignment operations using a tablet
- 10" multi-touch tablet with 1,280 x 800px resolution
- Lightweight with a modern design, dust & water resistant, adhesive magnets, 64GB of memory, 2MP front camera, 5MP rear camera, weighs less than 700g, fall resistant up to 76cm
- Made in Italy 

2 POST HOISTS

KPH370.45 Ravaglioli 4.5t Electro-Hydraulic 2-Post Clear Floor Vehicle Hoist

2
YEAR
WARRANTY

- Lifting capacity of 4,500kg
- Maximum lifting height 4,065mm or 4,165mm
- 3 different extensions height available on request from 3,625mm to 5,000mm
- Three-stage short arms & two-stage long arms provide asymmetric lifting of vans and off-road vehicles
- Each column features a maintenance-free lifting cylinder
- Includes top limit switch safety bar, door protectors, 4WD spacers & spacer holders
- Made in Italy 

KPH370.45LIK-A
also available
with long arms



KPH350.45 Ravaglioli 2P 4.5t Asymmetric Vehicle Hoist

2
YEAR
WARRANTY

- Lifting capacity of 4,500kg
- Maximum lifting height: 1,863mm (1,928mm with extensions)
- Lifting time of 54 seconds
- Minimum pad height of 100mm, maximum of 136mm
- Column distance (internal) of 2,916 mm
- Drive-through width of 2,659 mm
- Maximum usable height of 3,850 mm
- Minimum front arm length of 611mm, maximum of 1,131mm
- Minimum rear arm length of 802mm, maximum of 1,235mm
- Width of 3,486mm & height of 4,000mm



KPX42 Ravaglioli 4.2t Electro-Mechanical 2-Post Clear Floor Vehicle Hoist

2
YEAR
WARRANTY

- Lifting capacity of 4,200kg
- Maximum lifting height of 2,042mm
- Lifting time of 58 seconds
- Minimum pad height of 117mm, maximum of 153mm
- Column height of 2,860mm
- Drive-through width of 2,504mm
- Minimum ceiling height of 4,100mm
- Minimum front arm length of 525mm, maximum of 981mm
- Minimum rear arm length of 922mm, maximum of 1,460mm
- Width of 3,428 - 3,528mm
- Height of 4,000mm
- Made in Italy 



KPX32 Ravaglioli 3.2t Baseless Screw 2-Post Electro-Mechanical Clear Floor Vehicle Hoist

2
YEAR
WARRANTY

- Truly asymmetric columns designed to optimise the drive through
- 3-stage arms with quick fit & telescopic rubber pads
- Equipped with an acoustic anti toe trap system
- The geometry of the arms has been designed to lift from microcars to long wheel base sedan.
- Solid automatic arm locking.
- Maximum lifting height 2,000mm
- Lifting time 42 seconds
- Made in Italy 



AA50CF2PN Alemlube Automotive 5.0t Electro-Hydraulic 2-Post Clear Floor Vehicle Hoist

1
YEAR
WARRANTY

- Lifting capacity of 5,000kg
- Lifting height 1,900mm
- Minimum pad height 110mm
- Post height 4,420mm
- Includes 4WD extension
- Ideal for light commercial vehicles

AA50CF2PN-240V
also available



AA40CF2P Alemlube Automotive 4.0t Electro-Hydraulic 2-Post Clear Floor Vehicle Hoist

1
YEAR
WARRANTY

- Lifting capacity of 4,000kg
- Maximum lifting height of 1,900mm
- Minimum lowered height of 100mm
- Standard height clearance of 3,900mm
- Fast lifting time of 60 seconds
- Fast descent time of 18 to 40 seconds
- Distance between columns of 2,760mm
- Drive through width of 2,640mm
- Includes 4WD extensions

AA40CF2P-240V
also available



AA402-240V Alemlube Automotive 4.0t Electro-Hydraulic 2-Post Clear Floor Vehicle Hoist

1
YEAR
WARRANTY

- 240V single phase operation
- Lifting capacity of 4,000kg
- Maximum lifting height of 2,000mm
- Minimum lowered height of 110mm
- Fast lifting time of 60 seconds
- 100mm 4WD spacers included
- Standard height clearance of 3,950mm with overall height of 4,140mm



AA40FB2P Alemlube Automotive 4.0t Electro-Hydraulic 2-Post Floor Base Vehicle Hoist

1
YEAR
WARRANTY

- Lifting capacity of 4,000kg
- Lifting height of 1,900mm
- Minimum height of 100mm
- Inside column height of 2,824mm
- Post height of 2,826mm
- Lifting time of 55 seconds
- 115% dynamic loading & 150% static loading test

AA40FB2P-240V
also available



AA46001N

Alemlube Automotive Car Oil Filter Crusher with Stand

- Compact design suits workshops of all sizes
- Crushing time based on 10 CFM at 120psi (8bar) is 30 seconds
- Air pressure of 90 - 120psi
- Removes up to 85% of waste oil and crushes the filter to less than 1/6th of its original size
- Creates up to 20 tonnes of crushing pressure
- Suits filters with maximum height of 225mm and maximum width of 125mm
- Operates on normal workshop compressed air
- Unique safety door ensures the device will not operate unless secured
- Dimensions: 400mm(D) x 560mm(W) x 1,629mm(H)



1
YEAR
WARRANTY

372400

Samoa Mobile Waste Oil Drainer

- Premium quality & European engineering
- Drain bowl capacity of 20L
- Holding tank capacity of 100L
- Maximum working height of 2,000mm
- Minimum working height of 1,400mm
- Unique specially molded tray can be used to hold bolts, filters & washers
- Waste fluids can be pressurised or pumped out of the 100L capacity holding tank



2
YEAR
WARRANTY

AA205-3DG

Alemlube Automotive 205L 3 Drum Lubrication Gantry

- Designed to be a cost effective, low maintenance oil delivery system
- Steel bund with drain port & internal supports
- Moulded fibreglass mesh for drum support
- Alemlube 20m x 1/2" ID spring rewind oil hose reels
- Digital metered control guns, with drip trays
- Heavy duty 5:1 oil drum pump
- Tie down points for 205 drums
- Designed & welded to AS1554.1
- 2" BSP drain port for bund included

Also Available **AA205-2DG**
as above but with
2 Drum Lubrication Gantry



1
YEAR
WARRANTY

O30020

EL Series Waste Oil Drip Tray

- Controls & collects oil drips
- Suitable for all brands of hose reels/control valves
- Modular design suits any workshop
- Easily removed catchment tray for emptying & cleaning
- Helps to maintain an oil-free workshop floor
- WHS friendly
- Dimensions: 704mm (H) x 214mm (W) x 81.5mm (D), 165mm (D) inclusive of drip tray



1
YEAR
WARRANTY

10070

Alemlube Mobile Waste Oil Drainer / Extractor

- Collects waste oil from vehicle gear box or engine
- Air consumption: 200L/min. Air Inlet Pressure (for vacuum): 87~116PSI/6~8bar
- Oil ejection pressure: 10~14PSI/0.7~1bar.
- Vacuum degree: 0~14PSI/0~1bar
- Tank capacity: 70L.
- Collect tray capacity: 16L.
- Height of 1,100mm~1,680mm.
- Working temperature of 40~60°C (for engine oil)



2
YEAR
WARRANTY

30080

Alemlube Mobile Waste Oil Drainer

- Transfers & captures waste oil from crankcases, transmissions and differentials
- Catchment bowl capacity of 20L
- Holding tank capacity of 80L
- Height adjustable waste oil reservoir
- Holding tank emptied with the aid of air pressure
- Equipped with a pneumatic safety relief valve calibrated at 14psi (1bar)



2
YEAR
WARRANTY

41007

Alemlube Splash Mat for Oil Drainers

- 380mm diameter splash mat for waste oil drainers & oil extractors
- Inserts easily into funnels and pans. Ideal for vehicle workshops
- Allows fluids to quickly pass through into a funnel or pan
- Made from quality sponge with strong absorption
- Maintain OH&S standards
- Splash mat material resists engine oil, transmission fluid, coolant, brake cleaner, gear oil & other solvents



2
YEAR
WARRANTY

11020

Alemlube Battery Operated 20L Oil Drum Pump

- Flow rates of up to 4.6L/min
- Transfers up to 280L per charge
- Battery run time of up to 65 minutes
- Fast recharge time of 45 minutes
- 1.5m x 19mm ID long delivery hose
- Suitable for pumping engine, hydraulic & gear oils up to SAE 140, transmission and coolant fluids
- IK10 rated high impact resistant & IP42 rated weatherproof motor assembly
- Drainback nozzle holster eliminates annoying oil leaks
- Swivelling pump head eliminates the chance of hose kinks

Also Available **11020PTA**
Pumptube Assembly to suit **11020**



2
YEAR
WARRANTY

11205

Alemlube Battery Operated 205L Oil Drum Pump

- Flow rates of up to 4.6L/min
- Transfers up to 280L per charge
- Battery run time of up to 65 minutes
- Fast recharge time of 45 minutes
- 1.5m x 19mm ID long delivery hose
- Suitable for pumping engine, hydraulic & gear oils up to SAE 140, transmission and coolant fluids
- IK10 rated high impact resistant & IP42 rated weatherproof motor assembly
- Drainback nozzle holster eliminates annoying oil leaks
- Swivelling pump head eliminates the chance of hose kinks

Also Available **11205PTA**
Pumptube Assembly to suit **11205**



2
YEAR
WARRANTY

WHEEL BALANCERS

AAPWBFTLITE Alemlube Automotive Premium Megaspin FT Lite 3D Wheel Balancer

18 MONTH WARRANTY

The new Megaspin FT Lite fully-automatic balancing machine designed for mobile service, but perfect also for workshops where space is limited thanks to its exceptional compact size. Its extraordinary versatility makes the FT Lite usable anywhere, with the same performance as high end models.

- Lightweight, ergonomic, functional, & flexible.
- 3D wheel balancer for car & motorcycle wheels
- Laser line indicates the exact point where to apply the correction weights
- Laser Spotter to measure rim distance & diameter
- Virtual Sonar to automatically acquire the 3D width
- Rim width setting range 1.5" - 20" / 40 - 510mm
- Rim diameter setting range 10" - 30" / 265 - 765mm
- Maximum wheel weight < 75 kg
- Machine Weight < 30 kg
- Measuring cycle for 15 kg wheel 4.7 seconds
- Motorcycle wheel balancing program
- Made in Italy



Pictured with base unit
AAPWBFTLITE-46BV184166
sold separately

Also Available
AAPWBFTLITE-46BV184166
Optional Base Unit
AAPWBFTLITE-46FBA9883
Optional Wheel Kit
AAPWBFTLITE-12VINV
Optional 12V Inverter Kit

G3.150 Ravaglioli Electronic Wheel Balancer

2 YEAR WARRANTY

- 22" Colour Monitor with Graphics
- Rim Diameter 10" - 26"
- Rim Width 1.5" - 22"
- Maximum wheel weight 70kg
- Made in Italy

Also Available
G3.150WS as above
but with laser blade
for BDC placement
of adhesive weights
& width sonar
for automatic rim
width measurement



AA579 Alemlube Automotive Automatic Wheel Balancer with LCD Monitor & Laser Pointer

1 YEAR WARRANTY

- Rim width measurements 1.5" - 20"
- Rim diameter measurements 10" - 24"
- Maximum Wheel Weight 65Kg
- 9 Balancing modes
- Equipped with LCD monitor, 3D animation interface, easy to read balancing operating modes, with innovative adhesive weight placement laser for accuracy & convenience



AA828 Alemlube Automotive Automatic Wheel Balancer with LED Monitor

1 YEAR WARRANTY

- Automatic distance & wheel diameter measuring
- 6 different balancing programs
- Split & hidden wheel weight solution
- Rim width from 1.5" - 20"
- Rim diameter from 10" - 24"
- Maximum wheel weight of 65kg
- Measuring time of 8 seconds
- Balancing accuracy of $\pm 1.0g$



INTRODUCING ALEMLUBE AUTOMOTIVE PREMIUM WHEEL BALANCERS FROM GERMANY

NEW

18 MONTH WARRANTY

AAPWB220V Alemlube Automotive Premium Megaspin Compact Digital + Video Wheel Balancer

- Rim width setting range: 1.5" to 20"
- Rim diameter setting range: 10" to 30"
- Single phase power supply 240V, 50H
- Balancing speed 100rpm
- Measuring cycle for 15kg wheel: 4.7 seconds
- Software programs: Virtual Sonar & Laser Line
- Maximum wheel weight 75kg
- Machine weight 110kg
- Made in Germany

Also Available **AAPWB220** as above but without screen



Introducing ALEMLUBE AUTOMOTIVE PREMIUM Speed Plate Adaptors from the USA

18 MONTH WARRANTY



AAP200.001.400A
Alemlube Automotive Premium
3 Piece Speed Plate Pro Balancing System

Includes storage board
Also Available **AAP280.090.002A**
Storage Board only



AAP206.005.400A
Alemlube Automotive Premium
AWD & SUV Balancing Speed Plate



AAP280.010.818A
AAP280.010.589A
Alemlube Automotive Premium
Grip Handles for Balancers



AAP204.001.400A
Alemlube Automotive Premium
AWD & SUV Balancing Speed Plate

AA108 Alemlube Automotive Hand Spin Balancer

1 YEAR WARRANTY

- Manually operated distance & wheel diameter input
- Highly accurate & highly stable integrated circuit
- Self-calibration & diagnostic functions
- LED numeric display screen
- Brake pedal for accurate positioning of counter weights
- Rim diameter: 10"-24", rim width: 1.5"-20"
- Measuring time: 8 seconds
- Balancing accuracy: $\pm 1.0g$



AAL01 Alemlube Automotive Pneumatic Wheel Balancer Wheel Lift

NEW

1 YEAR WARRANTY

- 75kg Maximum wheel weight/lifting capacity
- Working air pressure 116-145psi
- Maximum lift height of 486mm
- Minimum lift level: 110mm
- Steel & aluminium composite construction with powder coated finish
- Pneumatically driven
- Ideal for light vehicles & heavy 4WD wheels
- Designed for use with most wheel balancers in use today
- Dimensions: 800mm x 510mm x 870mm (Maximum height 1,210mm)
- Weight of 50kg



MODULAR WORKSHOP FURNITURE



AAP8887

The Alemlube Automotive Premium Modular Workshop Furniture series offers an extensive selection of robust & adaptable garage workbench and storage solutions designed to meet the demands of any workspace.

SPECIFICATIONS, FEATURES & BENEFITS:

- **Sturdy Construction:** The range boasts a larger footprint with 600mm deep benchtops, crafted from extra-thick steel to withstand even the toughest garage environments. High quality drawer runners ensure smooth operation & durability.
- **Modular Flexibility:** Each unit is designed to join seamlessly with others, allowing you to create a customized, free-standing garage setup. Whether you need a compact workspace or a comprehensive solution, you can scale up as needed.
- **Easy Assembly:** The workbench & storage units come with clear instructions for quick and straightforward assembly.
- **Custom Solutions:** Alemlube offers the option to contact them for bespoke solutions or unique configurations tailored to your specific needs.

Whether you're setting up a new garage workshop or upgrading an existing one, the Alemlube Automotive Premium 8000 Series delivers the strength, versatility, & customization needed for a high-performance workspace

AAP8887

5 Metre Heavy Duty Workbench/Storage Unit

Includes:

- Lockable drawers & cabinets to secure tools
- Adjustable feet for levelling on uneven surfaces
- Overhead Storage cabinets (Qty 5) with gas struts & LED lighting (AAP6301)
- Single door tall cabinet with two adjustable shelves (AAP6302)
- Twin door cabinet with one shelf (AAP6303)
- 4 drawer cabinet with 45kg drawer capacity & soft closing slides (AAP6304)
- 5 drawer cabinet with 45kg drawer capacity & soft closing slides (AAP6305)
- Hanging Panel (Pegboard) with power board (Qty 2) (AAP6306)
- 2 Stainless steel bench tops 1,360mm & 2,040mm
- Twin door tall cabinet with three adjustable shelves (AAP6313)
- Dimensions of 4,915mm (W), 2,045mm (H), 600mm (D)
- Weight of 424kg



AAP8884B

3 Metre Heavy Duty Workbench/Storage Unit

Includes: 2m Double door storage cabinet, 5 drawer base cabinet, 2 door base cabinet, Rubbish bin cabinet, 3 x overhead cabinets, 3 x pegboards modules, 2.04m stainless steel bench top with MDF, 1 x power board & LED lighting



AAP8883

2.3 Metre Heavy Duty Workbench/Storage Unit

Includes: 2m Double door storage cabinet, 5 drawer base cabinet, 2 door base cabinet, 2 x overhead cabinets, 2 x pegboards modules, 1.36m stainless steel bench top with MDF, 1 x power board & LED lighting



Optional extras available include:

- AAP6312** 5 Drawer Roller Cabinet with 45kg Drawer
- AAP6317** Hose reel cabinet including 3 hose reels - air, water & electric
- AAP6318** Sink Cabinet
- AAP6319** Vice cabinet equipped with foldout Vice
- AAP6320** Fridge cabinet



AAP6312



AAP6320

AAP6300-HOOKS
3-piece hook set

AAP6300-ORGANISER
8 Drawer Dividers

AAP6300-ABS680,
1360 & 2040
ABS Plastic top

AAP6300-DIGITAL LOCK

Optional digital lock instead of key operated lock for drawer cabinets

AAP6300-ILLUMINATOR

Optional illuminated lights in multiple colours for drawer cabinets

AAP202 Workbench with Lockable Drawers



AAP202

ON CAR SERVICING EQUIPMENT

AA47042AN

Alemlube Automotive Coolant Exchanger

The Alemlube Automotive Coolant Exchange Machine helps extend the life of the cooling system components by keeping it clean and functioning as efficiently as possible.

- Real time display of new & old coolant capacity
- External new & old coolant observation window
- Completely exchanges radiator coolant quickly with little mess
- Supplied with radiator adaptors to suit most vehicles
- Dimensions of 650mm (W) x 590mm (D) x 1,080mm (H)
- Weight of 50kg
- 240V



AA47072A

Alemlube Automotive Fully Automatic ATF Exchanger

Extending the life of a transmission has just been made easier with the Alemlube Automotive Transmission Fluid Exchange Machines.

- Automatically replaces up to 90% of a vehicle's transmission fluid
- A complete ATF exchange done quickly
- Supplied with ATF adaptors to suit most vehicles
- Ideal for taxi and fleet workshops
- Dimensions of 605mm (L) x 500mm (W) x 1,140mm (H)
- Weight of 62kg
- 240V



AA47010N1

Alemlube Automotive Power Steering Fluid Exchanger

Allows for routine servicing of the power steering fluid system, extending component life, maintaining peak performance & reducing expensive repairs.

- Multi-fluid capability with quick & easy changeover between different power steering fluid types.
- 240V power with simple operations. just flip a switch and the machine begins extracting or adding fluid as required
- Clear two-channel hose, provides perfectly new fluid versus used fluid visually
- Dimensions of 520mm (L) x 415mm (W) x 1,050mm (H)
- Weight of 35kg



AAP2000

Alemlube Automotive Premium Fully Automatic Air Conditioning Station

- Recovers, recycles, evacuates & recharges
- Flow rates of up to 142L/min
- Internal receiver capacity 20kg
- Filter dryer capacity 50kg
- Refrigerant type: R134a
- Electronic scales
- Service hoses 2.5M
- Power: 1250VA
- Extensive database
- Printer
- Made in Italy

Also Available **AAP5000R** to suit R1234Y



FREE
AAACLDRT34A Electronic Refrigerant Gas Leak Detector
With any machine purchase



TYRE CHANGERS

AAL06 Alemlube Automotive Tyre Changer Wheel Lift

- Designed for use with most tyre changers in use today
- 65kg Maximum wheel weight/lifting capacity
- Increases efficiency & safety in the workshop
- Steel & aluminium composite construction
- Pneumatically driven
- Air supply pressure 8-10bar
- Maximum lift height of 635mm
- Ideal for light vehicles & 4WD wheels
- Powder coated finish
- Dimensions of 610mm x 710mm x 635mm
- Weight of 53kg



1
YEAR
WARRANTY

AA226A Alemlube Automotive 24" Tilt Back Tyre Changer with Helper Arm

- Fully automatic pneumatic lifting column
- Tubeless tyre inflating device
- Large 24" turntable suitable for low profile tyres
- Maximum rim width 14" (355mm)
- Maximum tyre diameter 39" (1,000mm)
- High strength alloy pedal



1
YEAR
WARRANTY

AA236A Alemlube Automotive 26" Tilt Back Tyre Changer with Helper Arm

- Automatic pneumatic right help arm device
- Large 26" turntable suitable for low profile tyres
- Maximum rim width 16" (406mm)
- Maximum tyre diameter 45" (1,143mm)
- Outside clamping: 12" - 23"
- Inside clamping: 14" - 26"
- Air supply: 8bar
- Bead breaker force: 2,500kg
- High strength alloy pedal
- Centering device keep the tyre & turntable in one concentric circle
- Weight of 345kg



1
YEAR
WARRANTY

AAPTC27HA Alemlube Automotive Premium 27" Tilt Back Tyre Changer

- Internal clamping capacity of 10" - 27"
- Maximum tyre diameter 43" (1,092mm)
- Maximum rim width 15" (381mm)
- 2 position adjustable jaws
- Double-speed system with pedal control
- Includes Helper Arm
- Under table inflation
- Made in Germany



18
MONTH
WARRANTY

G1250.30PLUSIT Ravaglioli Lever-less Tyre Changer with Helper Arm & Wheel Lift

- Minimum clamping capacity 10"
- Maximum clamping capacity 30"
- Maximum rim width 15"
- Maximum wheel diameter 1,194mm
- Dimensions: 1,760mm (W) x 2,100mm (D) x 2,090mm (H)
- Made in Italy



2
YEAR
WARRANTY

G7645ID.26-A Ravaglioli Automatic Tilt Back Tyre Changer

- Automatic 26" tyre changer with mount/demount device & rotating arm (includes assist arm PLUS83)
- The extra height of the vertical post & tool shaft allow easy servicing to any type of tyre to a maximum of 14" (355 mm) width
- Tool shaft has increased rigidity due to its tilted construction & allows for easier operation with extra-large tyres
- Suitable for large tyre shops
- Maximum rim width 17" (431mm)
- Maximum tyre diameter 45" (1,143mm)
- 12" - 28.5" internal clamping & 10" - 26" external clamping
- Made in Italy

h



2
YEAR
WARRANTY

G8945ITV.26S Ravaglioli Lever-less Tyre Changer

- Post with vertical "space saver" movement
- Powerful tool memory, returning back to rim edge position
- Ideal for HP & RFT tyres, centre mounting preventing rim damage
- Powerful tubeless tyre inflation system suitable for any rim diameter
- Maximum rim width 15" (381mm)
- Maximum tyre diameter 45" (1,143mm)
- Made in Italy



2
YEAR
WARRANTY

AAHA90 Alemlube Automotive 9L Bead Inflation Blaster

- Air volume of 9L
- Maximum air pressure of up to 145 psi (10bar)
- Normal air pressure of up to 116 psi (8 ar)
- Push button trigger allows technician to keep both hands on the tank for more control
- Seamless thick air tank that is durable & safe
- Made for run flat & low profile, 4WD & light commercial tyres
- Anti vibration oil filled pressure gauge
- Lightweight at 4.2kg



1
YEAR
WARRANTY

LED CORDLESS WORKSHOP LIGHTS

20022

Alemlube Workshop Floodlight



- Light Source: High Power COB LED – flood light
- Luminous Power: 800 lumen – Full Power mode
400 lumen – Normal mode
120 lumen – ECO mode
- Operating time: 2 hours – Full Power mode
3.5 hours – Normal mode
12 hours – ECO mode
- Battery Specification: Li-ion 3.7V, 2600mAh, 9.62Wh
- Charging Time: 4.5 hours
- Charging: USB-C 1m charging cable
- Degree of protection: IP65 and IK07
- Operating temperature: -10°C to +40°C
- Versatile lighting solution designed to meet the demands of various work environments



20044

Alemlube Foldable LED Slim & Compact Work Light



- Light Source: High power COB LED – Main light, High power SMD LED – Top light
- Luminous Power: Flood light 800 lumen – High mode, Flood light 150 lumen – Low mode, Flash light 400 lumen – High mode, Flash light 120 lumen – Low mode, Top light 120 lumen
- Operating time: Flood light High mode 2.5 hours, Flood light Low mode 8 hours, Flash light High mode 4 hours, Flash light Low mode 9 hours, Top Light 8 hours
- Battery Specification: Li-Ion 3.7V, 2600mAh, 9.62Wh
- Charging Time: 4 hours
- Charging: USB-C 1m charging cable
- Degree of protection: IP54 & IK07
- Operating temperature: -10°C to +40°C



20066N2

Alemlube LED Work Light with Aircon Gas Leak Detection



- The UV light is ideal for detecting Ultra Violet leak detection dye used in vehicle air conditioning systems
- Features two light sources, two strong magnets (back & base), two fold away hanging hooks and has a 180° adjustable handle for absolute versatility
- IP54 high moisture intrusion & IK07 impact resistance ratings
- Gas leak detection capabilities
- 4W COB LED, 400lm on body
- 3W SMD LED, 100lm on top
- 80 CRI to illuminate true colours
- 6500K
- 3.7V 2200mAh Li-ion battery
- 3 hour main light run time
- 10 hour top light run time
- 28 hour top UV light run time
- 3.5 hour charge time



20077

Alemlube LED Slimline Work Light



- 6W COB LED, min-max 250-600lm
- 3W SMD top LED, 120lm
- 80 CRI, 6500K
- 3.7V 2600mAh Li-ion battery
- 5.5 / 2.5 hour main light runtime
- 10.0 hour top light runtime
- 4 hour charge time
- IP54 foreign objects / moisture intrusion rating



20084N

Alemlube Rechargeable LED Slimline Vehicle Bonnet Work Light



- Unique bonnet hooks attach to the vehicle allowing maximum access to the workspace
- 8m cable plugs directly into mains power
- Shatter proof polycarbonate lens ensures a long service life
- Water and oil resistant
- 50 energy efficient LED's
- 3 light modes
LOW: 500lm, 9 hours run time
MID: 1,000lm, 6 hours run time
HIGH: 2,000lm, 3 hours run time
- 3 LED battery level indicator
- Battery with inbuilt USB charging input
- 360° rotational light bar
- Extendable from 117cm to 190cm
- Rubber coated hooks



20099

Alemlube Rechargeable LED Head Lamp



- Affordable, high-performance lighting
- Hands-free use with innovative motion on/off sensor technology
- Light Source: High power COB LED
- Luminous Power: 300 lumen – Normal mode full power
100 lumen – ECO mode
300 lumen – Sensor mode
- Operating time: 2 hours – Full Power mode
5.5 hours – ECO mode
2 hours – Sensor mode
- Battery Specification: Li-Po 3.7 V, 1500mAh, 5.55Wh
- Charging Time: 2.5 hours
- Charging: USB-C 1m charging cable
- Degree of protection: IP65 and IK07
- Operating temperature: -10°C to +40°C



For ordering, please contact your local Alemlube distributor.

All prices exclude GST and vehicle hoist installation costs. Delivery and freight charges apply. Repayments paid monthly over 60 months, excluding GST. To approved applicants subject to normal credit criteria. Alemlube will do everything possible, within reason to maintain stocks of products advertised but cannot be responsible for unforeseen shortfalls beyond their control.

NSW/ACT (02) 9677 1555 | QLD/PNG (07) 3491 2600 | VIC/TAS (03) 8787 8288 | WA (08) 9302 4199 | SA/NT (08) 8241 7111

info@alemlube.com.au alemlube.com.au

E&OE Prices & Specifications subject to change without prior notice © 2025 Alemlube Pty Ltd AWE&FS 1225

